



OECD approval number

1 704/2

Restricted Code

OECD approval date

17/11/1997

Make

Case IH

Model

MX 100

Type

4 WD

série MAXXUM - 16 speeds - 30 km/h

Manufacturer

Case United Kingdom Limited


Testing station:

DLG, Gross-Umstadt, Germany

Case MX100

4 RM/WD

OCDE/OECD 1704/2

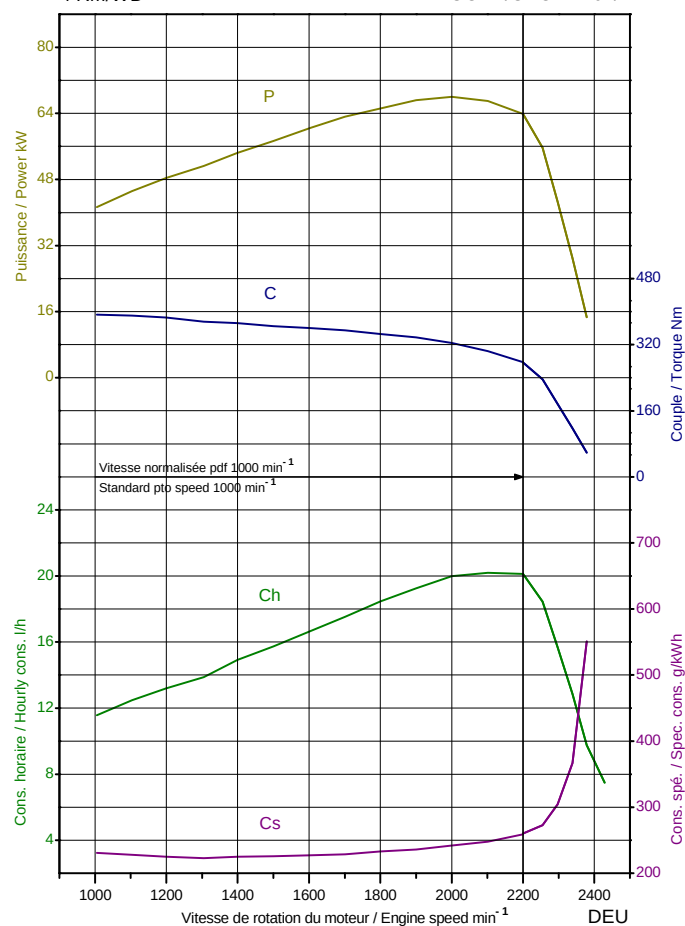

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	CDC	6T-590
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	5883 cm ³	Liquid
<i>Gear box</i>		Mechanical synchronized
<i>Number of forward and reverse speeds</i>	16	12
<i>Speed at rated engine speed</i>	from 2.19	to 29.57 km/h
<i>Standard Power take-off speed</i>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>	549 min ⁻¹	996 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	68.0 kW	2000 min ⁻¹	905 min ⁻¹
<i>Hourly and specific consumption</i>		19.98 l/h	242 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	63.9 kW	2200 min ⁻¹	996 min ⁻¹
<i>Hourly and specific consumption</i>		20.12 l/h	259 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	63.9 kW	2200 min ⁻¹	996 min ⁻¹
<i>Hourly and specific consumption</i>		20.12 l/h	259 g/kWh

Torque rise

			41.9 %
--	--	--	--------

Maximum torque, Engine speed corresponding

	393.0 Nm	1005 min ⁻¹	
--	----------	------------------------	--

Drawbar Test*Front tyres, Rear tyres*

	16.9 R 28	20.8 R 38
--	-----------	-----------

Test with tractor

	<u>unballasted</u>	<u>ballasted</u>
--	--------------------	------------------

Total Mass

	5810 kg	
--	---------	--

Maximum drawbar pull

	63.2 kN	Not
--	---------	-----

at speed of

	2.31 km/h	required
--	-----------	----------

Maximum power

	59.0 kW	in
--	---------	----

at speed of

	6.64 km/h	Code 2
--	-----------	--------

Hydraulic Performance and Power Lift Test*Hydraulic system*

		Closed centre
--	--	---------------

At maximum hydraulic power

<i>Flow rate, Pressure, Power</i>	89.7 l/min	15.0 MPa	22.4 kW
-----------------------------------	------------	----------	---------

Maximum lifting force

<i>at hitch points, at frame</i>		44.7 kN	35.3 kN
----------------------------------	--	---------	---------

