



OECD approval number

2/1 761

OECD approval date

Restricted Code

20/05/1998

Make

Case IH

Model

7250 PRO

Type

4 WD


MFWD - 18 speeds - 30 km/h

Case Corporation

Manufacturer

Testing station:

Nebraska Tractor Test Laboratory, Lincoln, USA

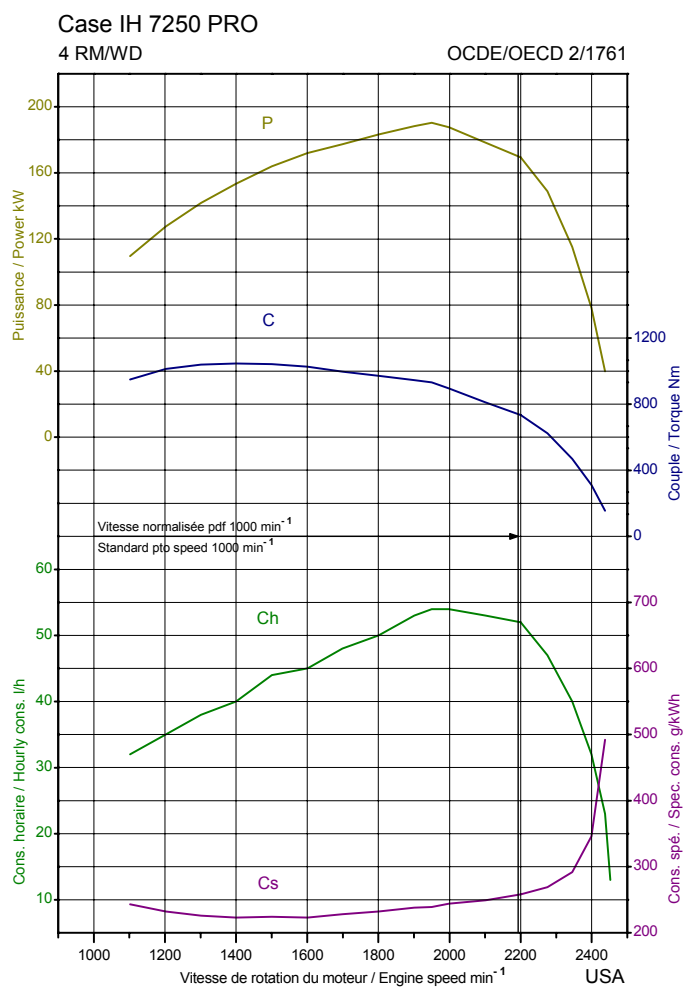

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Consolidated Diesel Co	6TA-830
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	8268 cm ³	Liquid
<i>Gear box</i>		Mechanical powershift
<i>Number of forward and reverse speeds</i>		18 4
<i>Speed at rated engine speed</i>		from 3.09 to 32.76 km/h
<u>Standard Power take-off speed</u>		<u>540 min⁻¹</u> <u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>		1003 min ⁻¹
<i>Diameter of the shaft</i>		45 mm
<i>Number of splines</i>		20

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	190.3 kW	1950 min ⁻¹	888 min ⁻¹
<i>Hourly and specific consumption</i>		53.96 l/h	239 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	169.4 kW	2200 min ⁻¹	1002 min ⁻¹
<i>Hourly and specific consumption</i>		51.65 l/h	258 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	169.4 kW	2200 min ⁻¹	1002 min ⁻¹
<i>Hourly and specific consumption</i>		51.65 l/h	258 g/kWh

Torque rise

			42.3 %
--	--	--	--------

Maximum torque, Engine speed corresponding

1046.0 Nm	1400 min ⁻¹
-----------	------------------------

Drawbar Test*Front tyres, Rear tyres*

16.9 R 30	20.8 R 42
-----------	-----------

Test with tractor

<u>unballasted</u>	<u>ballasted</u>
--------------------	------------------

Total Mass

8318 kg	11165 kg
---------	----------

Maximum drawbar pull

83.5 kN	112.9 kN
---------	----------

at speed of

5.54 km/h	4.47 km/h
-----------	-----------

Maximum power

167.0 kW	166.7 kW
----------	----------

at speed of

9.46 km/h	9.63 km/h
-----------	-----------

Hydraulic Performance and Power Lift Test*Hydraulic system*

Closed centre

At maximum hydraulic power

<i>Flow rate, Pressure, Power</i>	101.8 l/min	14.3 MPa	24.2 kW
-----------------------------------	-------------	----------	---------

Maximum lifting force

<i>at hitch points, at frame</i>		64.8 kN	54.6 kN
----------------------------------	--	---------	---------