



OECD approval number

2/1 891

Restricted Code

OECD approval date

13/03/2000

Make

Case IH

Model

MX 200

Type

4 WD


18 speeds - 40 km/h

Case Corporation

Manufacturer

Testing station:

Nebraska Tractor Test Laboratory, Lincoln, USA

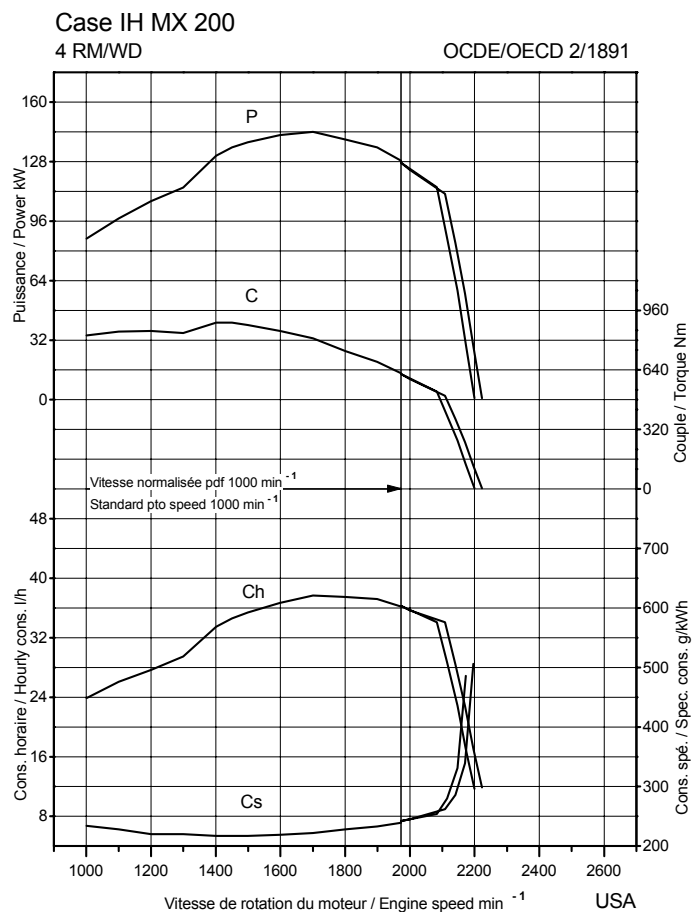

**Engine, Transmission, Power take-off Specifications**

<i>Make, Model</i>	Consolidated Diesel Company		6TAA-830
<i>Type, Supercharging</i>	Direct injection		Yes
<i>Cylinders, Disposition</i>	6		vertical in line
<i>Capacity, Cooling</i>	8268 cm <sup>3</sup>		Liquid
<i>Gear box</i>			Mechanical powershift
<i>Number of forward and reverse speeds</i>	18		4
<i>Speed at rated engine speed</i>	from 3.00		to 34.65 km/h
<u>Standard Power take-off speed</u>	<u>540 min<sup>-1</sup></u>		<u>1000 min<sup>-1</sup></u>
<i>Power take-off speed at rated engine speed</i>	545 min <sup>-1</sup>		1013 min <sup>-1</sup>
<i>Diameter of the shaft</i>	35 mm		44.5 mm
<i>Number of splines</i>	6		20

**Power take-off Test**Two hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	144.0 kW	1700 min <sup>-1</sup>	861 min <sup>-1</sup>
<i>Hourly and specific consumption</i>		37.69 l/h	222 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	123.6 kW	2000 min <sup>-1</sup>	1013 min <sup>-1</sup>
<i>Hourly and specific consumption</i>		35.71 l/h	245 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	127.4 kW	1973 min <sup>-1</sup>	1000 min <sup>-1</sup>
<i>Hourly and specific consumption</i>		36.27 l/h	242 g/kWh

Torque rise

		51.5 %	
--	--	--------	--

<u>Maximum torque, Engine speed corresponding</u>	894.0 Nm	1401 min <sup>-1</sup>	
---	----------	------------------------	--

**Drawbar Test**

<i>Front tyres, Rear tyres</i>	14.9 - 30	18.4 - 42
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	8924 kg	
<i>Maximum drawbar pull</i>	88.4 kN	Not
<i>at speed of</i>	3.59 km/h	required
<i>Maximum power</i>	122.9 kW	in
<i>at speed of</i>	7.72 km/h	Code 2

**Power Lift and Hydraulic Performance Test**

<i>Hydraulic system</i>			Closed centre
<i>Maximum lifting force at hitch points, at frame</i>		65.5 kN	56.2 kN
<u>At maximum hydraulic power</u>			
<i>Flow rate, Pressure, Power</i>	112.0 l/min	17.9 MPa	33.5 kW