



OECD approval number

2/2 174

Restricted Code

OECD approval date

11/10/2004

Make

Case IH

Model

JX 80

Type

2 WD

12 speeds - 30 km/h

Manufacturer

TÜRK TRAKTÖR ve ZIRAAT MAKINALARI A.S.


Testing station:

TAMTEST, Ankara, Turkey

Case IH JX 80

2 RM/WD

OCDE/OECD 2/2174

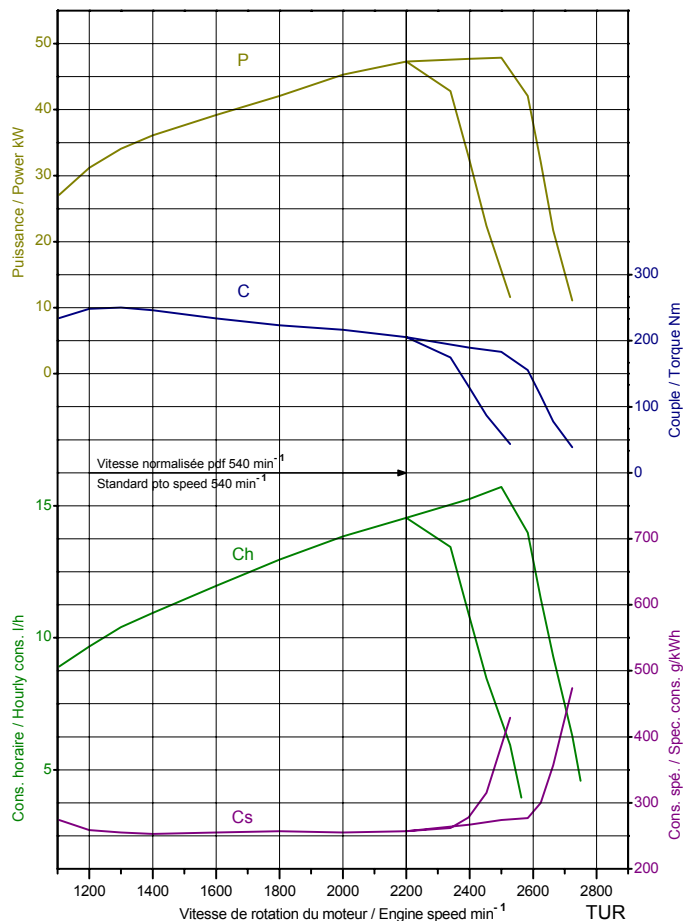

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Iveco	8045.05 R
<i>Type, Supercharging</i>	Direct injection	None
<i>Cylinders, Disposition</i>	4	vertical in line
<i>Capacity, Cooling</i>	3908 cm ³	By water
<i>Gear box</i>		Mechanical synchronized
<i>Number of forward and reverse speeds</i>		12 12
<i>Speed at rated engine speed</i>		from 1.77 to 29.25 km/h
<u>Standard Power take-off speed</u>		<u>540 min⁻¹</u> <u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>		614 min ⁻¹ None
<i>Diameter of the shaft</i>		34.9 mm
<i>Number of splines</i>		6

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	47.9 kW	2500 min ⁻¹	614 min ⁻¹
<i>Hourly and specific consumption</i>		15.72 l/h	274 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	47.9 kW	2500 min ⁻¹	614 min ⁻¹
<i>Hourly and specific consumption</i>		15.72 l/h	274 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	47.3 kW	2200 min ⁻¹	540 min ⁻¹
<i>Hourly and specific consumption</i>		14.54 l/h	257 g/kWh

Torque rise

		36.7 %
--	--	--------

Maximum torque, Engine speed corresponding

	250.5 Nm	1300 min ⁻¹
--	----------	------------------------

Drawbar Test*Front tyres, Rear tyres*

	9.00 - 16	16.9 R 34
--	-----------	-----------

Test with tractor

	<u>unballasted</u>	<u>ballasted</u>
--	--------------------	------------------

Total Mass

	3135 kg
--	---------

Maximum drawbar pull

	20.9 kN	Not
--	---------	-----

at speed of

	3.72 km/h	required
--	-----------	----------

Maximum power

	36.6 kW	in
--	---------	----

at speed of

	9.06 km/h	Code 2
--	-----------	--------

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>		Opened centre
-------------------------	--	---------------

At maximum hydraulic power

<i>Flow rate, Pressure, Power</i>	53.7 l/min	12.0 MPa	10.7 kW
-----------------------------------	------------	----------	---------

Maximum lifting force

<i>at hitch points, at frame</i>		20.0 kN	14.4 kN
----------------------------------	--	---------	---------

