

OECD approval number

OECD approval date

Make Model Type

Manufacturer


2/1 815 **Restricted Code** 31/03/1999 **New Holland** 9482

Articulated 4 WD

New Holland Canada Ltd., Versatile Farm Equipment Operations

PAMI, Portage La Prairie, Canada *Testing station:*

New Holland 9482 OCDE/OECD 2/1815 4 RM/WD

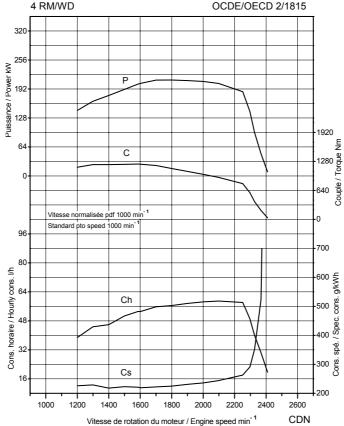



Engine, Transmission, Power take Make, Model Type, Supercharging Cylinders, Disposition Capacity, Cooling Gear box Number of forward and reverse spe Speed at rated engine speed Standard Power take-off speed Power take-off speed at rated engin Diameter of the shaft Number of splines	Cummins Driven Transfert Pump 6 10824 cm ³	12 from 4.77 <u>540 min⁻¹</u>	M11-C310 Yes vertical in line Liquid Mechanical 4 to 28.49 km/h 1000 min ⁻¹ 997 min ⁻¹ 44.5 mm 20
Power take-off Test			
Two hours test at maximum power Power, Engine and Power take-off. Hourly and specific consumption Test at maximum power at rated en		1800 min ⁻¹ 56.49 l/h	854 min ⁻¹ 225 g/kWh
Power, Engine and Power take-off . Hourly and specific consumption	speed 204.1 kW	2098 min ⁻¹ 59.01 l/h	996 min ⁻¹ 244 g/kWh
Test at standard Power take-off specific Power, Engine and Power take-off Hourly and specific consumption Torque rise Maximum torque, Engine speed con	speed 204.1 kW	2098 min ⁻¹ 59.01 l/h 1222.0 Nm	996 min ⁻¹ 244 g/kWh 31.5 % 1587 min ⁻¹
Drawbar Test Front tyres, Rear tyres Test with tractor Total Mass Maximum drawbar pull at speed of Maximum power at speed of		20.8 R 42 <u>unballasted</u> 13608 kg 149.0 kN 4.14 km/h 189.8 kW 6.42 km/h	20.8 R 42 <u>ballasted</u> Not required in Code 2
Hydraulic Performance and Power Lift Test			
Hydraulic system			Closed centre
At maximum hydraulic power Flow rate, Pressure, Power Maximum lifting force at hitch points, at frame	161.7 l/min	15.7 MPa	42.3 kW

