




OECD approval number
OECD approval date
Make
Model
Type

Manufacturer:
Testing station:

2/2 651
29/11/2011
New Holland
T7.200
4 WD
full powershift - 40 km/h
CNH Europe Holding S.A.
IMAMOTER – Torino, Italy

New Holland T7.200
4 RM/WD

OCDE/OECD 2/2 651

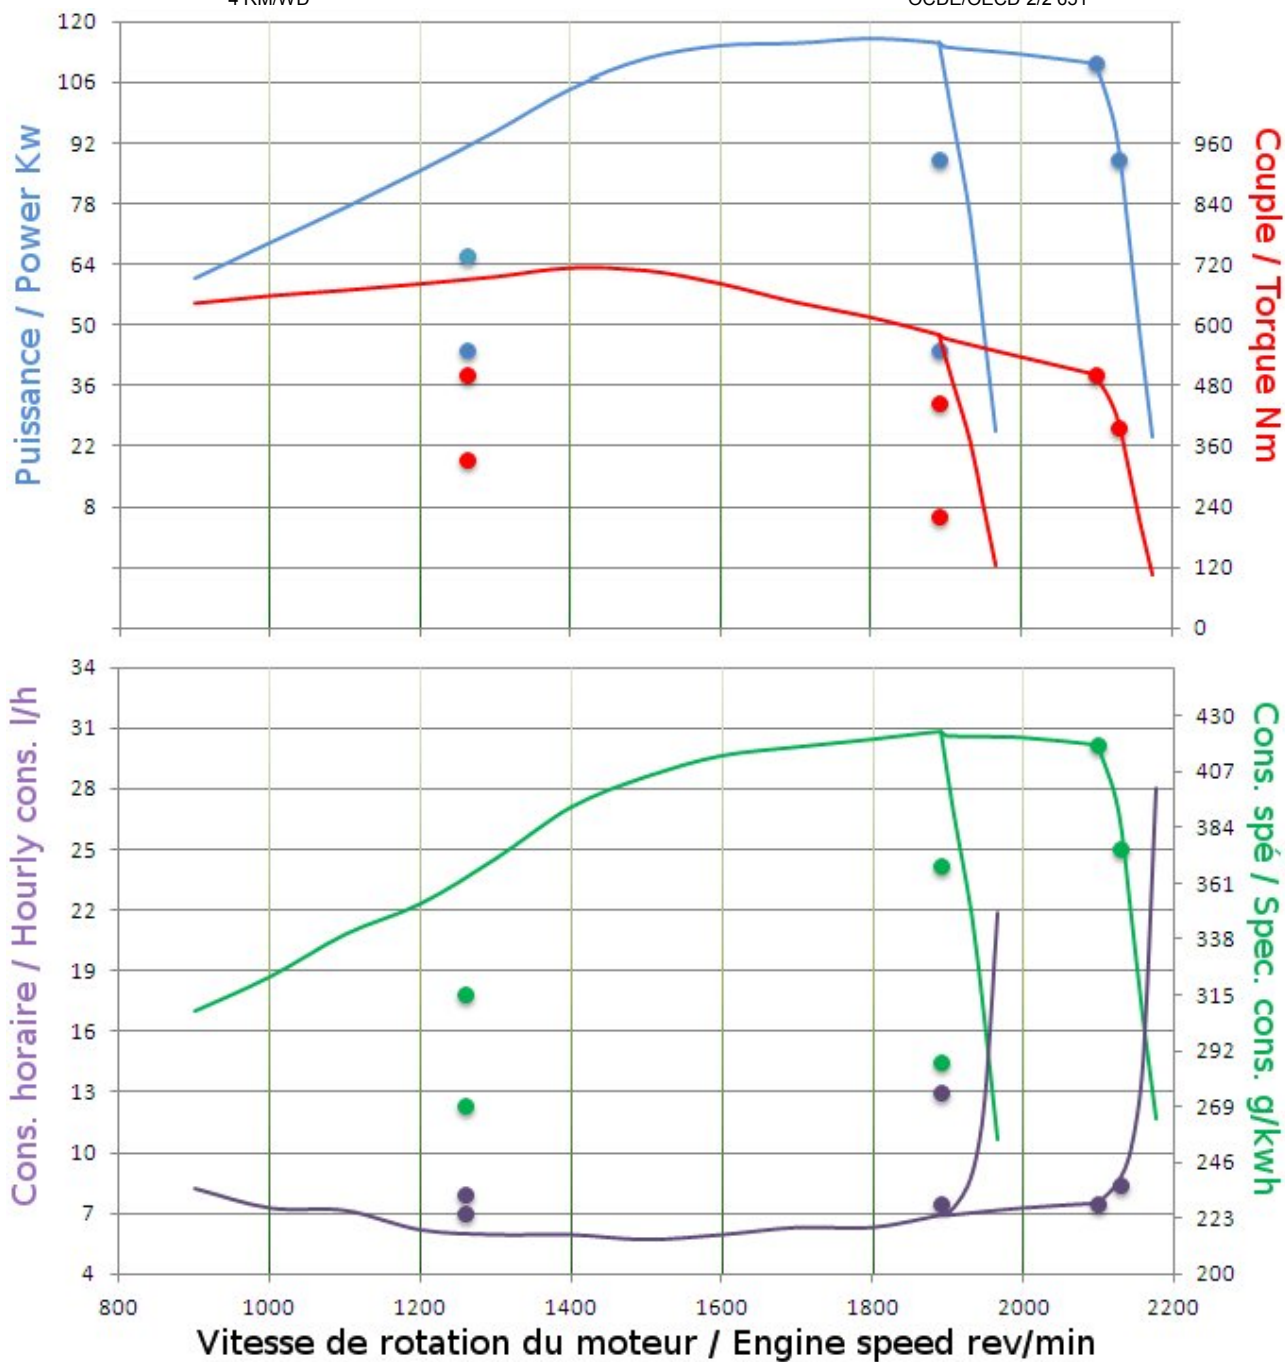

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Iveco	F4DFE613A
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	6728 cm ³	Liquid
<i>Gear box</i>		mechanical
<i>Number of forward and reverse speeds</i>	18	6
<i>Speed at rated engine speed</i>	from 1,9	to 38,8 km/h
<u>Standard Power take-off speed</u>	540 min ⁻¹	1000 min ⁻¹
<i>Power take-off speed at rated engine speed</i>	576 min ⁻¹	1109 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

Power take-off TestOne hour test at maximum power

<i>Power, Engine and Power take-off speed</i>	116,1 kW	1800 min ⁻¹	952 min ⁻¹
<i>Hourly and specific consumption</i>		30,47 l/h	219 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	110,3 kW	2100 min ⁻¹	1111 min ⁻¹
<i>Hourly and specific consumption</i>		30,19 l/h	229 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	115,1 kW	1890 min ⁻¹	1000 min ⁻¹
<i>Hourly and specific consumption</i>		30,84 l/h	224 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>	714,3 Nm	1400 min ⁻¹	42,4 %
---	----------	------------------------	--------

Drawbar Test

<i>Front tyres, Rear tyres</i>	540/65R30	650/65R42
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	6790 kg	
<i>Maximum drawbar pull</i>	61,3 kN	<i>Not</i>
<i>at speed of</i>	2,4 km/h	<i>Applicable</i>
<i>Maximum power</i>	96,4 kW	
<i>at speed of</i>	13,2 km/h	

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>			Closed centre
<u>At maximum hydraulic power</u>			
<i>Flow rate, Pressure, Power (couplers: 1 pair)</i>	90,1 l/min	17,0 MPa	25,5 kW
<i>Flow rate, Pressure, Power (couplers: 2 pairs or +)</i>	89,9 l/min	18,0 MPa	27,0 kW
<u>Maximum lifting force</u>			
<i>at the hitch points, at frame</i>		40,9 kN	36,1 kN