




OECD approval number
OECD approval date
Make
Model
Type

Manufacturer:
Testing station:

2/2 713
03/08/2012
CASE IH
Magnum 290
4WD
Powershift - 40 km/h
CNH America, LLC
Nebraska Tractor Test Laboratory
Lincoln, Nebraska U.S.A.

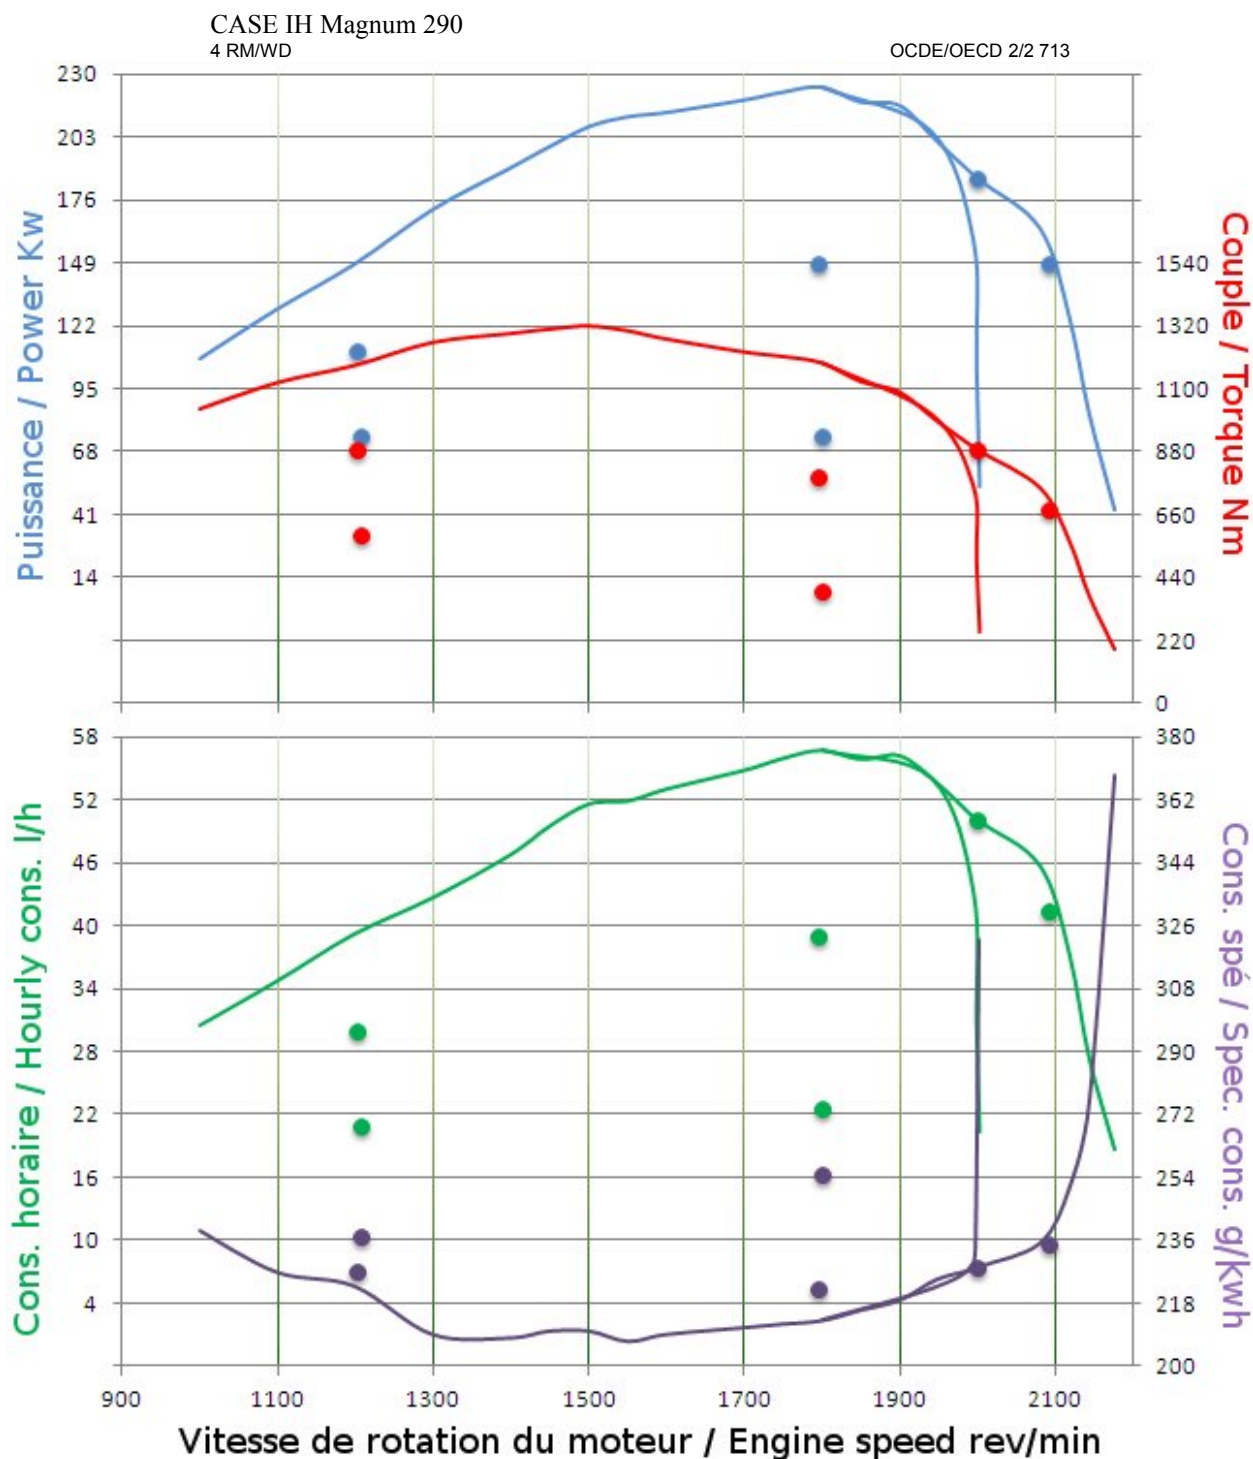

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	FPT	Cursor 9L
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	8704 cm ³	Liquid
<i>Gear box</i>		Powershift
<i>Number of forward and reverse speeds</i>	19	4
<i>Speed at rated engine speed</i>	from 3,15	to 45,75 km/h
<i>Standard Power take-off speed</i>	540 min ⁻¹	1000 min ⁻¹
<i>Power take-off speed at rated engine speed</i>	597 min ⁻¹	1109 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	44 mm
<i>Number of splines</i>	6	20

Power take-off TestOne hour test at maximum power

<i>Power, Engine and Power take-off speed</i>	224,38 kW	1800 min ⁻¹	998 min ⁻¹
<i>Hourly and specific consumption</i>		56,73 l/h	213 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	185,26 kW	2000 min ⁻¹	1109 min ⁻¹
<i>Hourly and specific consumption</i>		50,03 l/h	228 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	224,38 kW	1800 min ⁻¹	998 min ⁻¹
<i>Hourly and specific consumption</i>		56,73 l/h	213 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>	1320 Nm	1501 min ⁻¹
---	---------	------------------------

Drawbar Test

<i>Front tyres, Rear tyres</i>	420/90 R30	520/85 R42
<i>Test with tractor</i>	unballasted	ballasted
<i>Total Mass</i>	10952 kg	14436 kg
<i>Maximum drawbar pull</i>	104,62 kN	137,38 kN
<i>at speed of</i>	4,76 km/h	3,61 km/h
<i>Maximum power</i>	193,48 kW	193,24 kW
<i>at speed of</i>	9,56 km/h	8,42 km/h

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>			Closed centre
<i>At maximum hydraulic power</i>			
<i>Flow rate, Pressure, Power (couplers: 1 pair)</i>	136,5 l/min	15,76 MPa	35,9 kW
<i>Flow rate, Pressure, Power (couplers: 2 pairs or +)</i>	165,3 l/min	17,76 MPa	48,9 kW
<i>Maximum lifting force</i>			
<i>at the hitch points, at frame</i>		77,9 kN	63,4 kN