


OECD approval number **OECD** approval date Make Model Type

Manufacturer: Testing station:

2/2 752 22/02/2013 **CASE IH FARMALL 75C** 2WD Mechanical - 30 km/h CNH EUROPE HOLDING S.A. DISTAL – Bologna, Italy

CASE IH FARMALL 75C 2 RM/WD

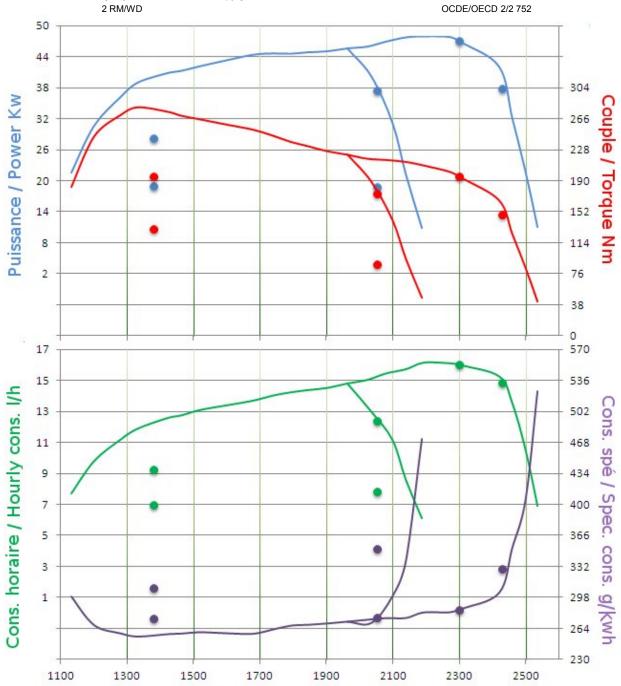

Vitesse de rotation du moteur / Engine speed rev/min





Engine, Transmission, Power take-off Specifications Make, Model Type, Supercharging Cylinders, Disposition Capacity, Cooling Gear box Number of forward and reverse speeds Speed at rated engine speed Standard Power take-off speed Power take-off speed at rated engine speed Diameter of the shaft	FPT Industrial Direct injection 4 3200 cm ³	8 from 2,54 540 min ⁻¹ 634 min ⁻¹ 35 mm	F5AE9454K Yes vertical in line Liquid Mechanical 8 to 32,42 km/h 1000 min ⁻¹ Not
Number of splines		6	Applicable
Power take-off Test One hour test at maximum power			1
Power, Engine and Power take-off speed Hourly and specific consumption Test at maximum power at rated engine speed	48,0 kW	2192 min ⁻¹ 16,14 l/h	605 min ⁻¹ 282 g/kWh
Power, Engine and Power take-off speed Hourly and specific consumption Test at standard Power take-off speed	47,1 kW	2300 min ⁻¹ 16,02 l/h	634 min ⁻¹ 285 g/kWh
Power, Engine and Power take-off speed Hourly and specific consumption Torque rise	45,7 kW	1964 min ⁻¹ 14,81 l/h	542 min ⁻¹ 272 g/kWh 43,1 %
Maximum torque, Engine speed corresponding		280,1 Nm	1332 min ⁻¹
Drawbar Test			
Front tyres, Rear tyres		7.50-16	420/85 R30
Test with tractor		<u>unballasted</u>	<u>ballasted</u>
Total Mass Maximum drawbar pull		2345 kg 15,11 kN	
at speed of		5,14 km/h	Not
Maximum power		34,86 kW	<i>Applicable</i>
at speed of		14,85 km/h	
Hydraulic Performance and Power Lift Test			
Hydraulic system			Open centre
At maximum hydraulic power Flow rate, Pressure, Power (couplers: 1 pair)	45,7 l/min	17,5 MPa	13,3 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	13,7 1/11111	Not	Applicable
Maximum lifting force		15 (O LNI	10.50 131
at the hitch points, at frame		15,62 kN	12,52 kN



