

**OECD** approval number

**OECD** approval date Make Model

**Restricted Code** 03/11/00 John Deere 8210T Rubber tracklaying tractor

John Deere Tractor Works

2/1 934


Powershift - 30 km/h

Manufacturer Testing station:

Type

Nebraska Tractor Test Laboratory, Lincoln, USA

## John Deere 8210T

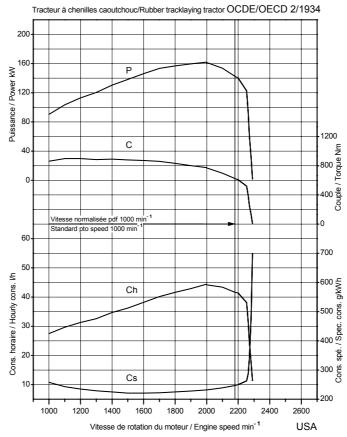



Engine, Transmission, Power take-off Specific Make, Model Type, Supercharging Disciplination Cylinders, Disposition Capacity, Cooling Gear box Number of forward and reverse speeds Speed at rated engine speed Standard Power take-off speed Power take-off speed at rated engine speed Diameter of the shaft Number of splines	John Deere rect injection 6 8134 cm <sup>3</sup>	16	6081HWR14 Yes vertical in line Liquid ical powershift 4 to 29.13 km/h 1000 min <sup>-1</sup> 1009 min <sup>-1</sup> 44.5 mm 20
Power take-off Test			
Two hours test at maximum power Power, Engine and Power take-off speed Hourly and specific consumption Test at maximum power at rated engine speed Power, Engine and Power take-off speed Hourly and specific consumption Test at standard Power take-off speed Power, Engine and Power take-off speed Hourly and specific consumption Torque rise	161.3 kW 140.3 kW 140.3 kW	2000 min <sup>-1</sup> 44.16 l/h 2200 min <sup>-1</sup> 41.45 l/h 2200 min <sup>-1</sup> 41.45 l/h	917 min <sup>-1</sup> 232 g/kWh 1009 min <sup>-1</sup> 250 g/kWh 1009 min <sup>-1</sup> 250 g/kWh 47.5 %
Maximum torque, Engine speed corresponding		898.0 Nm	1200 min <sup>-1</sup>
		0,0.011111	1200 111111
Track length and track width Test with tractor Total Mass Maximum drawbar pull at speed of Maximum power at speed of		8230 mm unballasted 11521 kg 108.9 kN 2.68 km/h 137.0 kW 7.63 km/h	406.4 mm ballasted  Not required in Code 2
Power Lift and Hydraulic Performance Test			
Hydraulic system  Maximum lifting force at hitch points, at frame  At maximum hydraulic power		56.7 kN	Closed centre 55.8 kN
Flow rate, Pressure, Power	124.2 l/min	17.5 MPa	36.2 kW

