



OECD approval number  
OECD approval date  
Make  
Model  
Type


Manufacturer:  
Testing station:

2/2 813  
19/02/2014  
CASE IH  
FARMALL 105 C  
4WD

Mechanical - 40 km/h  
CNH Europe Holding S.A.  
DISTAL – Bologna, Italy

CASE IH FARMALL 105 C  
4WD

OCDE/OECD 2/2 813

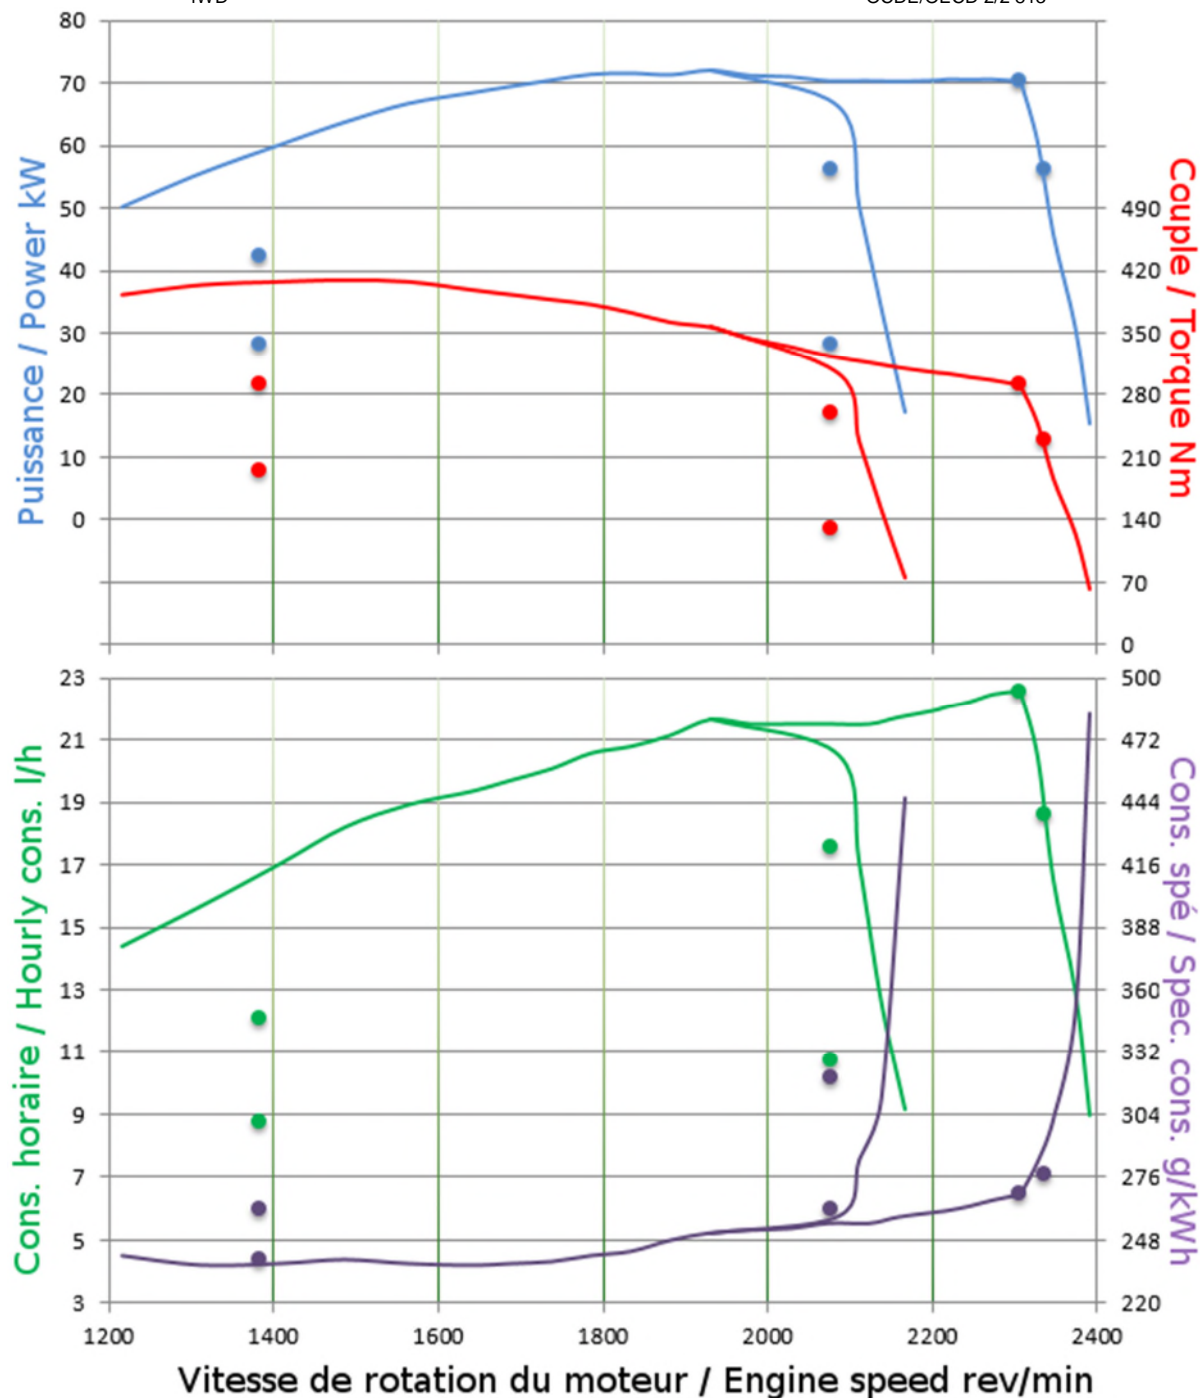

**Engine, Transmission, Power take-off Specifications**

<i>Make, Model</i>	FTP Industrial	F5DFL413J
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	4	vertical in line
<i>Capacity, Cooling</i>	3387 cm <sup>3</sup>	Liquid
<i>Gear box</i>		Mechanical
<i>Number of forward and reverse speeds</i>	12	12
<i>Speed at rated engine speed</i>	from 2,15	to 38,22 km/h
<u>Standard Power take-off speed</u>	540 min <sup>-1</sup>	1000 min <sup>-1</sup>
<i>Power take-off speed at rated engine speed</i>	641 min <sup>-1</sup>	1194 min <sup>-1</sup>
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

**Power take-off Test**One hour test at maximum power

<i>Power, Engine and Power take-off speed</i>	72,1 kW	1930 min <sup>-1</sup>	538 min <sup>-1</sup>
<i>Hourly and specific consumption</i>		21,62 l/h	251 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	70,4 kW	2306 min <sup>-1</sup>	642 min <sup>-1</sup>
<i>Hourly and specific consumption</i>		22,55 l/h	269 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	72,1 kW	1930 min <sup>-1</sup>	538 min <sup>-1</sup>
<i>Hourly and specific consumption</i>		21,62 l/h	251 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>		409,7 Nm	1486 min <sup>-1</sup>
---------------------------------------------------	--	----------	------------------------

**Drawbar Test**

<i>Front tyres, Rear tyres</i>	440/65 R24	540/65 R34
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	3445 kg	
<i>Maximum drawbar pull</i>	27,94 kN	
<i>at speed of</i>	5,64 km/h	Not
<i>Maximum power</i>	57,28 kW	Applicable
<i>at speed of</i>	9,02 km/h	

**Hydraulic Performance and Power Lift Test**

<i>Hydraulic system</i>			Open centre
<u>At maximum hydraulic power</u>			
<i>Flow rate, Pressure, Power (couplers: 1 pair)</i>	50,8 l/min	17,4 MPa	14,7 kW
<i>Flow rate, Pressure, Power (couplers: 2 pairs or +)</i>		Not	Applicable
<u>Maximum lifting force</u>			
<i>at the hitch points, at frame</i>		17,53 kN	15,65 kN