



OECD approval number

2/1 974

Restricted Code

OECD approval date

22/02/2002

Make

Case IH

Model

STX 325

Type

Articulated 4 WD with dual wheels

Manufacturer

Case Corporation


Testing station:

Nebraska Tractor Test Laboratory, Lincoln, USA

Case IH STX 325

4 RM Articulé/Articulated 4 WD

OCDE/OECD 2/1974

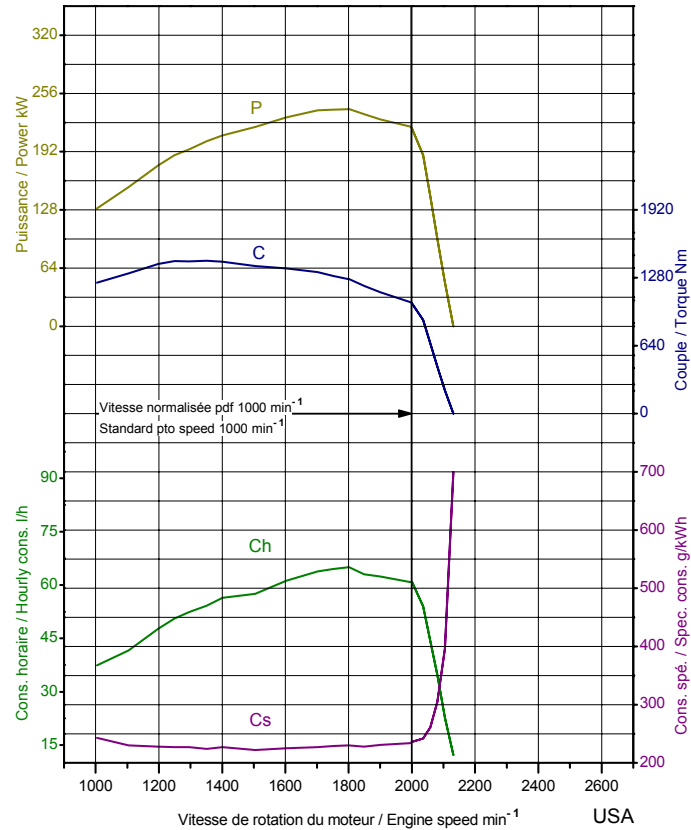

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Case	6TAA-9304
<i>Type, Supercharging</i>	Driven Transfert Pump	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	8849 cm ³	Liquid
<i>Gear box</i>		Mechanical powershift
<i>Number of forward and reverse speeds</i>	16	2
<i>Speed at rated engine speed</i>	from 3.93	to 33.65 km/h
<u>Standard Power take-off speed</u>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>		1001 min ⁻¹
<i>Diameter of the shaft</i>		44.5 mm
<i>Number of splines</i>		20

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	239.2 kW	1800 min ⁻¹	901 min ⁻¹
<i>Hourly and specific consumption</i>		65.10 l/h	230 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	217.6 kW	2000 min ⁻¹	1001 min ⁻¹
<i>Hourly and specific consumption</i>		60.92 l/h	236 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	217.6 kW	2000 min ⁻¹	1001 min ⁻¹
<i>Hourly and specific consumption</i>		60.92 l/h	236 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>	1440.0 Nm	1351 min ⁻¹	38.6 %
---	-----------	------------------------	--------

Drawbar Test

<i>Front tyres, Rear tyres</i>	20.8 - 42	20.8 - 42
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	14485 kg	
<i>Maximum drawbar pull</i>	145.9 kN	Not
<i>at speed of</i>	4.48 km/h	required
<i>Maximum power</i>	217.1 kW	in
<i>at speed of</i>	7.04 km/h	Code 2

Power Lift and Hydraulic Performance Test

<i>Hydraulic system</i>		Closed centre
<i>Maximum lifting force at hitch points, at frame</i>	77.8 kN	69.7 kN
<u>At maximum hydraulic power</u>		
<i>Flow rate, Pressure, Power</i>	131.0 l/min	16.9 MPa 36.9 kW