



OECD approval number

2/2 335

Restricted Code

OECD approval date

21/03/2006

Make

Challenger

Model

MT 565B

Type

4 WD

F44 - CVT - 40 km/h

Manufacturer

AGCO S.A.


Testing station:

DLG, Gross-Umstadt, Germany

Challenger MT 565 B (F44)

4 RM/WD

OCDE/OECD 2/2335

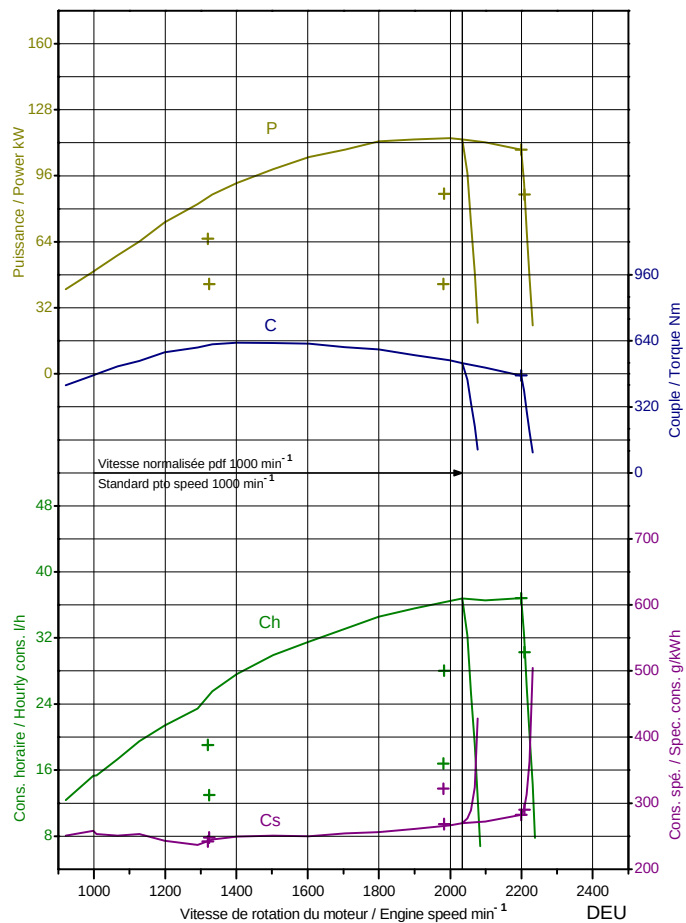

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Caterpillar	3056E DITAAC
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	5985 cm ³	Liquid
<i>Gear box</i>		Hydrostatic and mechanical
<i>Number of forward and reverse speeds</i>		Not significant
<i>Speed at rated engine speed</i>		from 0.00 to 40.00 km/h
<i>Standard Power take-off speed</i>		540 min^{-1} 1000 min^{-1}
<i>Power take-off speed at rated engine speed</i>		576 min^{-1} 1083 min^{-1}
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	114.2 kW	1999 min^{-1}	983 min^{-1}
<i>Hourly and specific consumption</i>		36.50 l/h	266 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	108.6 kW	2199 min^{-1}	1081 min^{-1}
<i>Hourly and specific consumption</i>		36.82 l/h	282 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	113.5 kW	2034 min^{-1}	1000 min^{-1}
<i>Hourly and specific consumption</i>		36.78 l/h	270 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>		630.0 Nm	1401 min^{-1}
---	--	----------	-------------------------

Drawbar Test*Front tyres, Rear tyres*

420/90 R 30 520/85 R 42

Test with tractorunballasted ballasted*Total Mass*

6495 kg

Maximum drawbar pull

66.0 kN

*at speed of*4.63 km/h *required**Maximum power*

94.3 kW

*at speed of*14.24 km/h *Code 2***Hydraulic Performance and Power Lift Test***Hydraulic system*

Closed centre

At maximum hydraulic power*Flow rate, Pressure, Power*

98.4 l/min

17.0 MPa

27.9 kW

Maximum lifting force*at hitch points, at frame*

57.2 kN

50.0 kN

