


OECD approval number2/2 573OECD approval date06/09/2010MakeNEW HOLLANDModelT7070Type4 WDcontinuously variable transmission - 50 km/hManufacturer:CNH Osterreich GmbHTesting station:HBLFA Francisco Josephinum BLT<br/>Biomass, Austria



ORGANISATION FOR ECONOMIC CO-OPERATION AND DEVELOPMENT



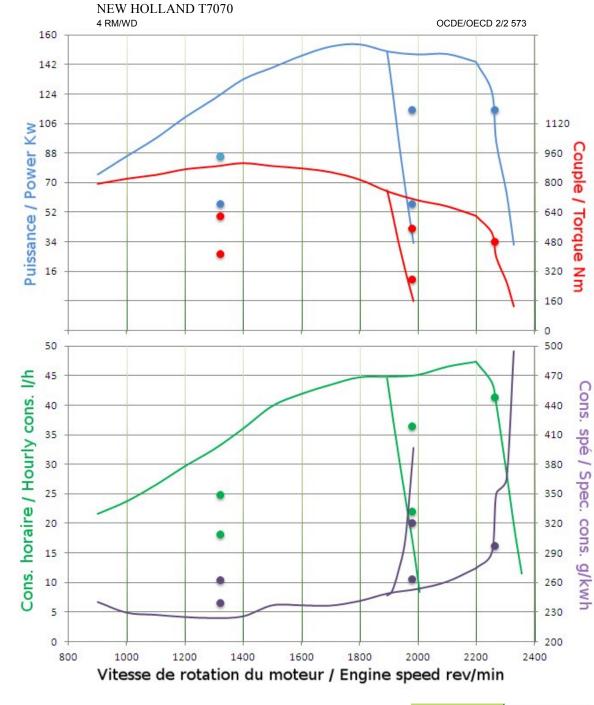

Engine, Transmission, Power take-off Specifications			
Make, Model	CNH		667TA/EBV
Type, Supercharging	Direct injection		Yes
Cylinders, Disposition	6		vertical in line
Capacity, Cooling	$6728 \text{ cm}^3$		Liquid
Gear box	0,200	continuously variable transmission	
Number of forward and reverse speeds		NA	NA
Speed at rated engine speed		from 0	to 49,90 km/h
Standard Power take-off speed		$540 \text{ min}^{-1}$	$1000 \text{ min}^{-1}$
Power take-off speed at rated engine speed		609 min <sup>-1</sup>	$1162 \text{ min}^{-1}$
Diameter of the shaft		34,9 mm	34,9 mm
Number of splines		6	21
		-	
Power take-off Test			
One hour test at maximum power			
Power, Engine and Power take-off speed	154,0 kW	1800 min <sup>-1</sup>	951 min <sup>-1</sup>
Hourly and specific consumption		44,71 dm <sup>3</sup> /h	241,2 g/kWh
Test at maximum power at rated engine speed			-
Power, Engine and Power take-off speed	143.4 kW	2200 min <sup>-1</sup>	1162 min <sup>-1</sup>
Hourly and specific consumption		47,33 dm <sup>3</sup> /h	274,2 g/kWh
Test at standard Power take-off speed			
Power, Engine and Power take-off speed	150,0 kW	1893 min <sup>-1</sup>	$1000 \text{ min}^{-1}$
Hourly and specific consumption		44,49 dm <sup>3</sup> /h	246,5 g/kWh
<u>Torque rise</u>			45,5 %
Maximum torque, Engine speed corresponding		905,5 Nm	1400 min <sup>-1</sup>
Drawbar Test			
Front tyres, Rear tyres		600/65/R 28	710/70/R 38
Test with tractor		unballasted	Ballasted
Total Mass		8765 kg	
Maximum drawbar pull		84,78 kN	Not
at speed of		2,06 km/h	Required
Maximum power		131,58 kW	
at speed of		11,47 km/h	
Hydraulic Performance and Power Lift Test			
Hydraulic system			Closed
<u>At maximum hydraulic power</u>			
Flow rate, Pressure, Power (couplers: 1 pair)	148,0 l/min	16,0 MPa	39,5 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	152,3 l/min	19,0 MPa	48,2 kW
Maximum lifting force	·	,	,
at the hitch points, at frame		82,4 kN	69,5 kN
-			

ORGANISATION FOR ECONOMIC CO-OPERATION AND DEVELOPMENT



