




OECD approval number 2/2 548
OECD approval date 11/03/2010
Make International Tractors Ltd.
Model Sonalika International DI –60(2WD)
Type 2 WD
ZB - mechanical transmission - 30 km/h
Manufacturer: M/s International Tractors Limited
Testing station: Central Farm Machinery Training and Testing Institute, Budni, India

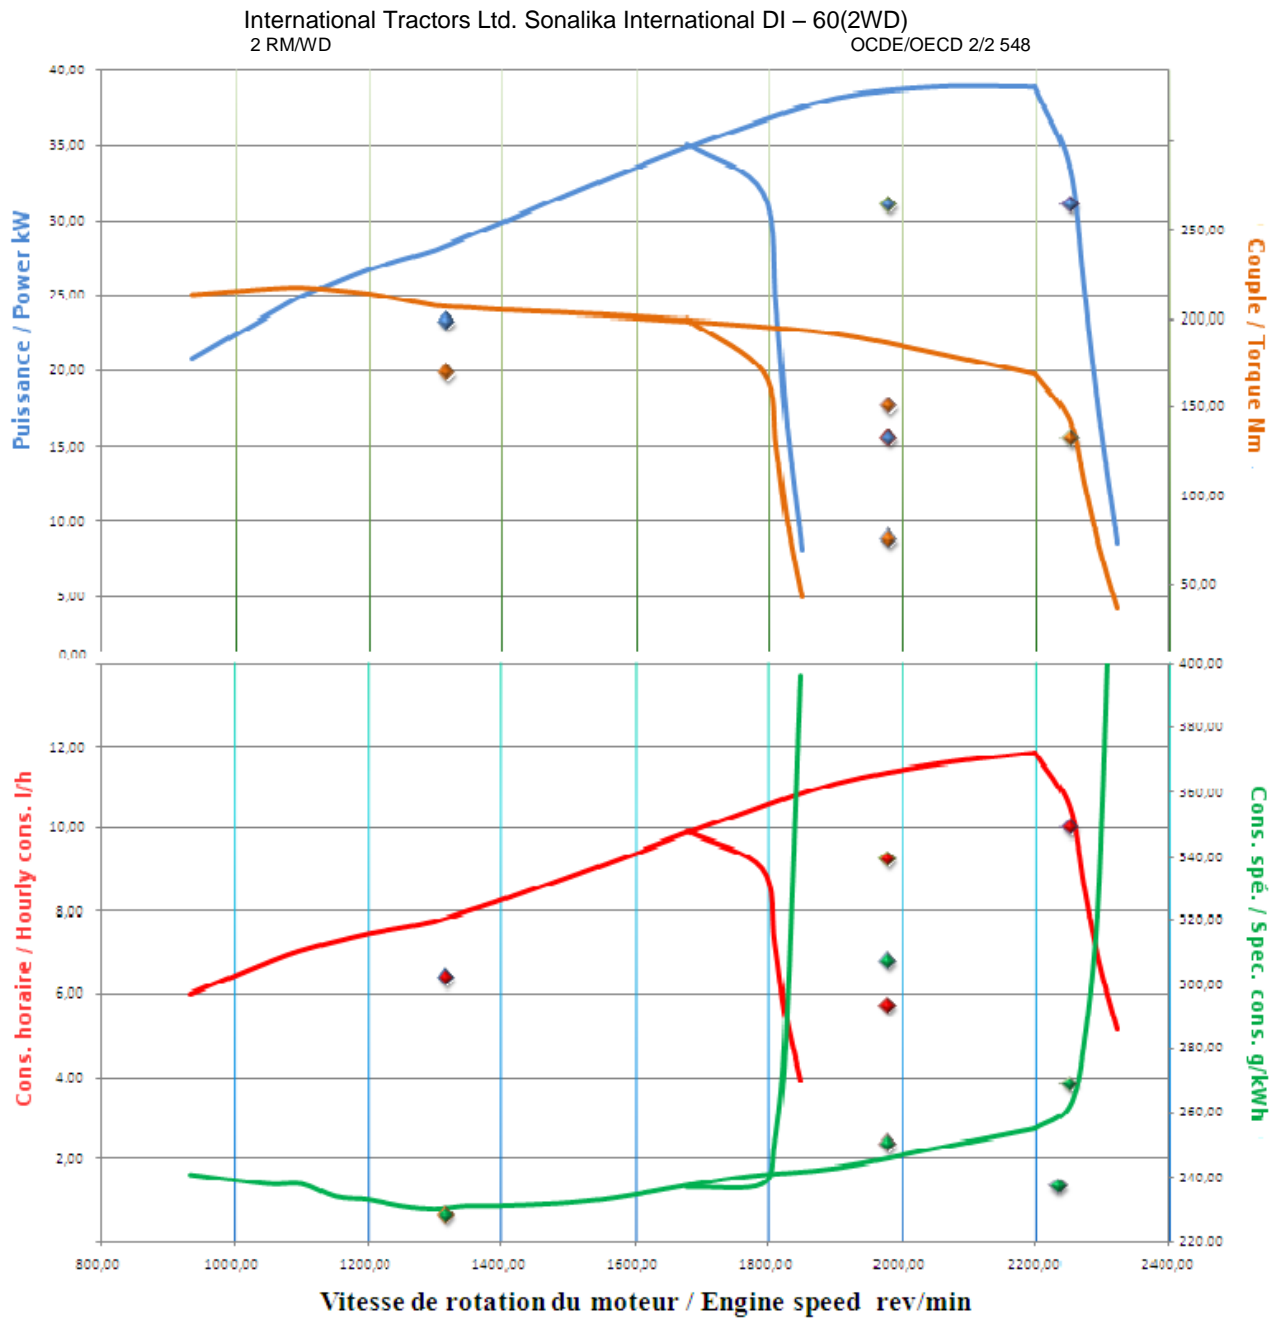

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	International Tractors Ltd.	4100FL
<i>Type, Supercharging</i>	Direct injection	No
<i>Cylinders, Disposition</i>	4	vertical in line
<i>Capacity, Cooling</i>	3707 cm ³	water cooled
<i>Gear box</i>		Mechanical
<i>Number of forward and reverse speeds</i>	8	2
<i>Speed at rated engine speed</i>		from 2,87 to 35,10 km/h
<u>Standard Power take-off speed</u>		<u>540 min⁻¹</u> <u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>		707 min ⁻¹ Not
<i>Diameter of the shaft</i>	34,84 mm	required
<i>Number of splines</i>	6	

Power take-off TestOne hour test at maximum power

<i>Power, Engine and Power take-off speed</i>	38,8 kW	2199 min ⁻¹	707 min ⁻¹
<i>Hourly and specific consumption</i>		11,85 l/h	255 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	38,8 kW	2199 min ⁻¹	707 min ⁻¹
<i>Hourly and specific consumption</i>		11,85 l/h	255 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	35,1 kW	1680 min ⁻¹	540 min ⁻¹
<i>Hourly and specific consumption</i>		9,93 l/h	237 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>		216,7 Nm	1101 min ⁻¹
---	--	----------	------------------------

Drawbar Test

<i>Front tyres, Rear tyres</i>	7.50 – 16	16.9 – 30
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	2500 kg	
<i>Maximum drawbar pull</i>	17,88 kN	Not
<i>at speed of</i>	5,72 km/h	required
<i>Maximum power</i>	32,0 kW	
<i>at speed of</i>	10,90 km/h	

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>		Open
-------------------------	--	------

At maximum hydraulic power

<i>Flow rate, Pressure, Power (couplers: 1 pair)</i>	23,80 l/min	16,5 Mpa	6,55 kW
<i>Flow rate, Pressure, Power (couplers: 2 pairs or +)</i>			Not applicable

Maximum lifting force

<i>at the hitch points, at frame</i>	12,97 kN	11,67 kN
--------------------------------------	----------	----------