


OECD approval number OECD approval date Make Model Type

Manufacturer: Testing station: 2/2 654 5/12/2011 New Holland T7.210 4 WD CVT - 40 km/h CNH Europe Holding S.A. IMAMOTER – Torino, Italy

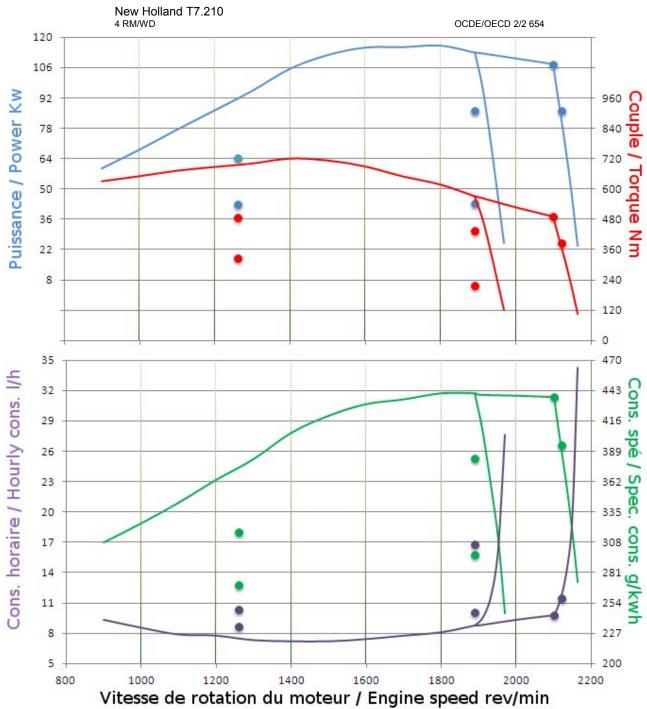

Engine, Transmission, Power take-off Specifications			
Make, Model	Iveco		F4DFE613B
Type, Supercharging	Direct injection		Yes
Cylinders, Disposition	6		vertical in line
Capacity, Cooling	$6728 \text{ cm}^3$		Liquid
Gear box			CVT
Number of forward and reverse speeds		Not	Applicable
Speed at rated engine speed		from 0	to 40,5 km/h
Standard Power take-off speed		540 min <sup>-1</sup>	1000 min <sup>-1</sup>
Power take-off speed at rated engine speed			1109 min <sup>-1</sup>
Diameter of the shaft		Not	35 mm
Number of splines		Applicable	21
Damen Aslas off Tord			
Power take-off Test One hour test at maximum power			
	115 2 LW	1800 min <sup>-1</sup>	952 min <sup>-1</sup>
Power, Engine and Power take-off speed	115,3 kW		
Hourly and specific consumption  Test at maximum power at rated engine speed		31,83 l/h	231 g/kWh
Power, Engine and Power take-off speed	110,8 kW	2100 min <sup>-1</sup>	1111 min <sup>-1</sup>
Hourly and specific consumption	110,6 KW	32,13 l/h	242 g/kWh
Test at standard Power take-off speed		32,13 1/11	242 g/K W II
Power, Engine and Power take-off speed	114,7 kW	1890 min <sup>-1</sup>	1000 min <sup>-1</sup>
Hourly and specific consumption	114,/ KW	32,12 l/h	234 g/kWh
Torque rise		32,12 1/11	38,2 %
Maximum torque, Engine speed corresponding		696,3 Nm	1400 min <sup>-1</sup>
waximum torque, Engine speed corresponding		0,0,5 11111	1400 111111
Drawbar Test			
Front tyres, Rear tyres		540/65R30	650/65R42
<u>Test with tractor</u>		unballasted	<u>ballasted</u>
Total Mass		7090 kg	
Maximum drawbar pull		62,4 kN	Not
at speed of		4,4 km/h	Applicable
Maximum power		97,9 kW	**
at speed of		6,7 km/h	
ui specu oj		0,7 KIII/II	
Hydraulic Performance and Power Lift Test			
Hydraulic system			Closed centre
At maximum hydraulic power			
Flow rate, Pressure, Power (couplers: 1 pair)	96,9 l/min	16,5 MPa	26,6 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	120,0 l/min	17,0 MPa	34,0 kW
Maximum lifting force			
at the hitch points, at frame		56,3 kN	44,1 kN