


OECD approval number OECD approval date Make Model Type

Manufacturer: Testing station: 2/2 703 25/07/2012 Massey Ferguson 7619 4 WD Hydrostatic variable - 40 km/h AGCO S.A. IRSTEA – Paris, France



ORGANISATION FOR ECONOMIC CO-OPERATION AND DEVELOPMENT

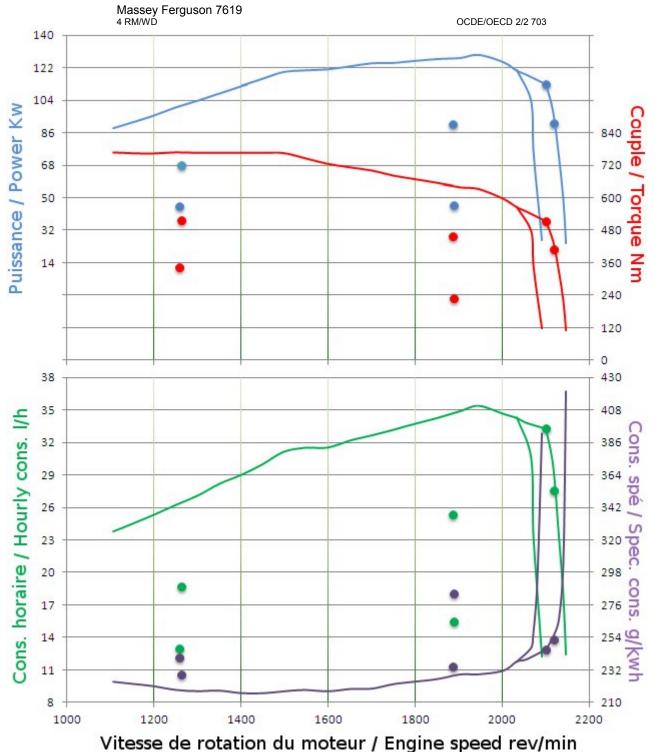



Engine, Transmission, Power take-off Specifications			
Make, Model	SISU AGCO POWER inc		66 AWI 769
Type, Supercharging	Direct injection		Yes
Cylinders, Disposition	6		vertical in line
Capacity, Cooling	6596 cm^3		Liquid
<i>Gear box</i>			Hydrostatic variable
Number of forward and reverse speeds		-	-
Speed at rated engine speed Standard Power take-off speed		from 0 540 min ⁻¹	to 40 km/h 1000 min ⁻¹
<u>Standard Power take-off speed</u> Power take-off speed at rated engine speed		594 min^{-1}	1000 min^{-1}
Diameter of the shaft		34,9 mm	34,9 mm
Number of splines		6	21
5 1			
Power take-off Test			
One hour test at maximum power			
Power, Engine and Power take-off speed	129,2 kW	1945 min ⁻¹	956 min ⁻¹
Hourly and specific consumption		35,11 l/h	229 g/kWh
Test at maximum power at rated engine speed	112 0 LW	2100 min ⁻¹	1032 min ⁻¹
Power, Engine and Power take-off speed Hourly and specific consumption	113,0 kW	33,28 l/h	245 g/kWh
Test at standard Power take-off speed		33,28 1/11	245 g/K W II
Power, Engine and Power take-off speed	120,5 kW	2034 min ⁻¹	1000 min ⁻¹
Hourly and specific consumption	120,0 111	34,27 l/h	238 g/kWh
<u>Torque rise</u>		- ,	49,12 %
Maximum torque, Engine speed corresponding		766,2 Nm	1250 min ⁻¹
Drawbar Test			
Front tyres, Rear tyres		540/65R30	650/65R38
<u>Test with tractor</u>		unballasted	ballasted
Total Mass		8390 kg	
Maximum drawbar pull		75,0 kN	Not
at speed of		2,23 km/h	Applicable
Maximum power		101,5 kW	
at speed of		11,01 km/h	
Huduaulia Daufaumanaa ar 1 Damar I 14 Taat			
Hydraulic Performance and Power Lift Test Hydraulic system			Closed centre
At maximum hydraulic power			
Flow rate, Pressure, Power (couplers: 1 pair)	104,7 l/min	13,4 MPa	23,4 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	110,5 l/min	15,5 MPa	28,5 kW
Maximum lifting force	*	,	,
at the hitch points, at frame		65,1 kN	61,0 kN



