



OECD approval number
OECD approval date
Make
Model
Type


Manufacturer:
Testing station:

2/2 697
06/07/2012
CASE IH
MAXXUM 130
4 WD

Semi-powershift - 50 km/h
CNH Europe Holding S.A.
IMAMOTER – Torino, Italy

CASE IH MAXXUM 130
4 RM/WD

OCDE/OECD 2/2 697

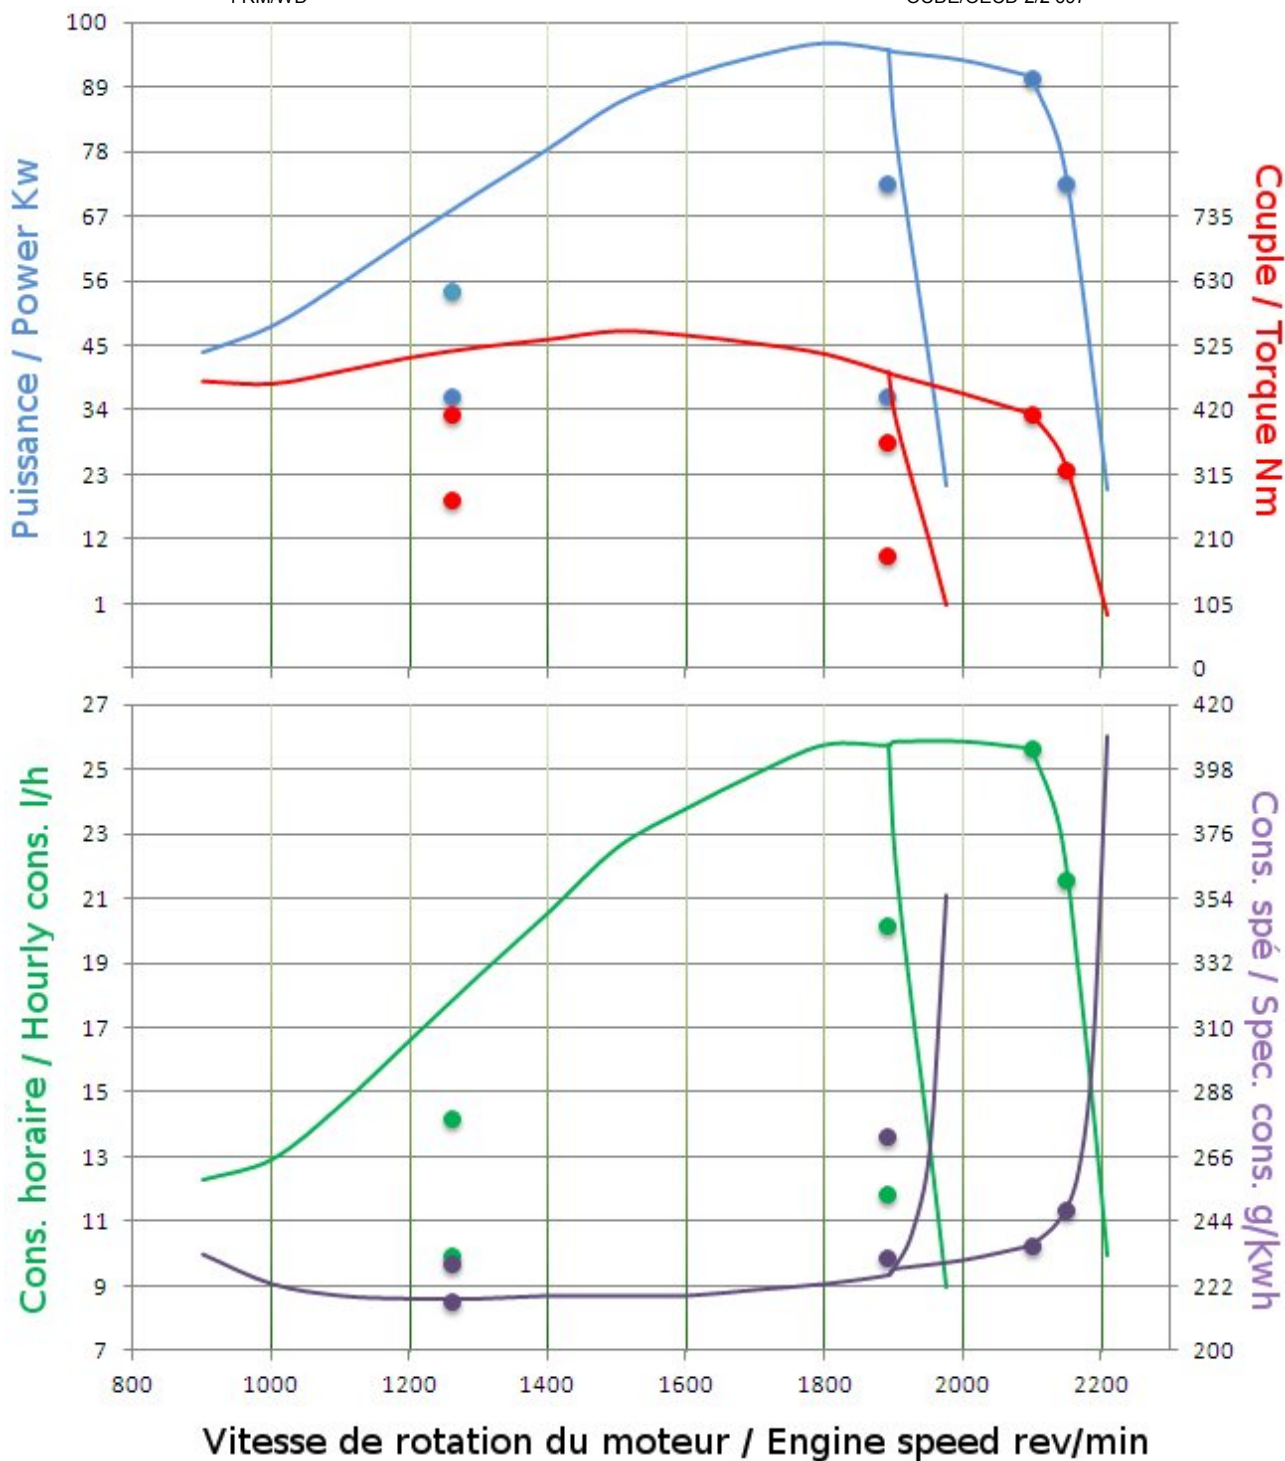

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	CNH	F4DFE413A
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	4	vertical in line
<i>Capacity, Cooling</i>	4485 cm ³	Liquid
<i>Gear box</i>		Semi-powershift
<i>Number of forward and reverse speeds</i>	17	16
<i>Speed at rated engine speed</i>	from 2,2	to 46,1 km/h
<u>Standard Power take-off speed</u>	540 min ⁻¹	1000 min ⁻¹
<i>Power take-off speed at rated engine speed</i>	576 min ⁻¹	1109 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	6

Power take-off TestOne hour test at maximum power

<i>Power, Engine and Power take-off speed</i>	96,4 kW	1800 min ⁻¹	951 min ⁻¹
<i>Hourly and specific consumption</i>		25,77 l/h	223 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	90,7 kW	2100 min ⁻¹	1109 min ⁻¹
<i>Hourly and specific consumption</i>		25,66 l/h	236 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	95,2 kW	1893 min ⁻¹	1000 min ⁻¹
<i>Hourly and specific consumption</i>		25,75 l/h	226 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>	548,9 Nm	1500 min ⁻¹	33,03 %
---	----------	------------------------	---------

Drawbar Test

<i>Front tyres, Rear tyres</i>	480/65R28	600/65R38
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	5630 kg	
<i>Maximum drawbar pull</i>	50,3 kN	Not
<i>at speed of</i>	2,02 km/h	Applicable
<i>Maximum power</i>	77,2 kW	
<i>at speed of</i>	8,68 km/h	

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>			Closed centre
<u>At maximum hydraulic power</u>			
<i>Flow rate, Pressure, Power (couplers: 1 pair)</i>	93,7 l/min	16,5 MPa	25,8 kW
<i>Flow rate, Pressure, Power (couplers: 2 pairs or +)</i>	94,2 l/min	18,5 MPa	29,2 kW
<u>Maximum lifting force</u>			
<i>at the hitch points, at frame</i>	46,4 kN	37,4 kN	