




OECD approval number
OECD approval date
Make
Model
Type

Manufacturer:
Testing station:

2/2 745
06/02/2013
CASE IH
FARMALL 75C
4WD
Mechanical - 40 km/h
CNH Europe Holding S.A.
DISTAL - Department of Agricultural and
Food Sciences - University of Bologna

CASE IH FARMALL 75C
4 RM/WD

OCDE/OECD 2/2 745

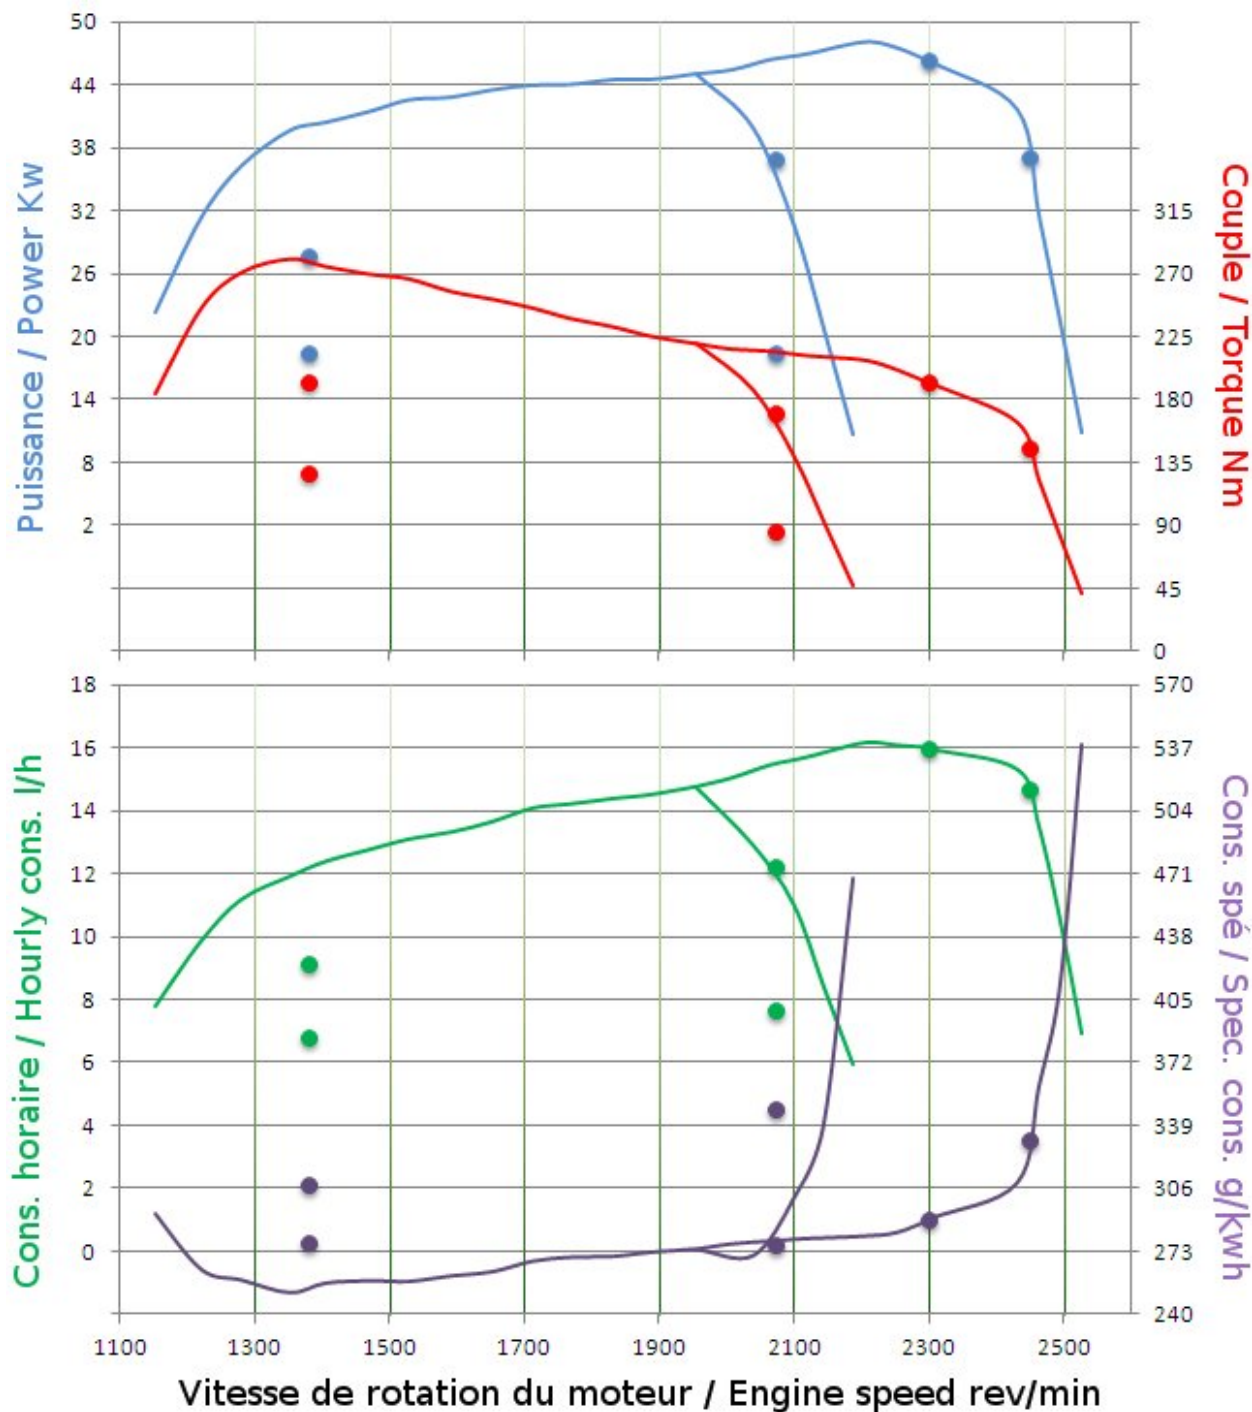

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	FPT Industrial	F5AE9454K
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	4	vertical in line
<i>Capacity, Cooling</i>	3200 cm ³	Liquid
<i>Gear box</i>		Mechanical
<i>Number of forward and reverse speeds</i>		12
<i>Speed at rated engine speed</i>	from 0,93	to 38,74 km/h
<i>Standard Power take-off speed</i>	540 min ⁻¹	1000 min ⁻¹
<i>Power take-off speed at rated engine speed</i>	634 min ⁻¹	
<i>Diameter of the shaft</i>	35 mm	Not
<i>Number of splines</i>	6	Applicable

Power take-off TestOne hour test at maximum power

<i>Power, Engine and Power take-off speed</i>	48,1 kW	2204 min ⁻¹	608 min ⁻¹
<i>Hourly and specific consumption</i>		16,13 l/h	281 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	46,3 kW	2300 min ⁻¹	634 min ⁻¹
<i>Hourly and specific consumption</i>		15,98 l/h	289 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	45,1 kW	1956 min ⁻¹	540 min ⁻¹
<i>Hourly and specific consumption</i>		14,75 l/h	274 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>		280,1 Nm	1352 min ⁻¹
---	--	----------	------------------------

Drawbar Test

<i>Front tyres, Rear tyres</i>	280/85 R24	420/85 R30
<i>Test with tractor</i>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	2700 kg	
<i>Maximum drawbar pull</i>	21,65 kN	
<i>at speed of</i>	2,66 km/h	Not
<i>Maximum power</i>	37,57 kW	Applicable
<i>at speed of</i>	11,67 km/h	

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>			Open centre
<i>At maximum hydraulic power</i>			
<i>Flow rate, Pressure, Power (couplers: 1 pair)</i>	45,0 l/min	17,55 MPa	13,18 kW
<i>Flow rate, Pressure, Power (couplers: 2 pairs or +)</i>			Not Applicable
<i>Maximum lifting force</i>			
<i>at the hitch points, at frame</i>		15,48 kN	12,44 kN