

OECD ABSTRACT OF AGRICULTURAL AND FORESTRY TRACTOR PERFORMANCE TEST

OECD Approval Number	2/2 865
OECD Approval Date	14/01/2015
Make	NEW HOLLAND
Model	T 4.105
Type	4 WD
Transmission	mechanical
Speed	40 km/h
Manufacturer	CNH Industrial Europe Holding S.A.
Testing Station	DISTAL – Italy



SPECIFICATIONS

ENGINE

<i>Make</i>		FTP Industrial
<i>Model</i>		F5DFL413J
<i>Type</i>		Direct injection
<i>Supercharging</i>		Yes
<i>Cylinders</i>		4
<i>Disposition</i>		vertical in line
<i>Capacity</i>		3387 cm ³
<i>Cooling</i>		Liquid

TRANSMISSION

<i>Gear box</i>		Mechanical
<i>Number of forward and reverse speeds</i>	12	12
<i>Speed at rated engine speed</i>	from 0,94	to 38,68 km/h

POWER TAKE-OFF SPECIFICATIONS

<i>Standard Power take-off speed</i>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>	662 min ⁻¹	1082 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

PTO TEST RESULTS

One hour test at maximum power

Power, Engine and Power take-off speed	71,4 kW	1872 min ⁻¹	539 min ⁻¹
Hourly and specific consumption		20,69 l/h	243 g/kWh
Hourly and specific urea consumption		-	-

Test at maximum power at rated engine speed


Power, Engine and Power take-off speed	66,2 kW	2296 min ⁻¹	661 min ⁻¹
Hourly and specific consumption		22,20 l/h	281 g/kWh
Hourly and specific urea consumption		-	-

Test at standard Power take-off speed

Power, Engine and Power take-off speed	71,4 kW	1872 min ⁻¹	539 min ⁻¹
Hourly and specific consumption		20,69 l/h	243 g/kWh
Hourly and specific urea consumption		-	-

Torque rise

<u>Maximum torque, Engine speed corresponding</u>		414,7 Nm	1497 min ⁻¹
---------------------------------------------------	--	----------	------------------------

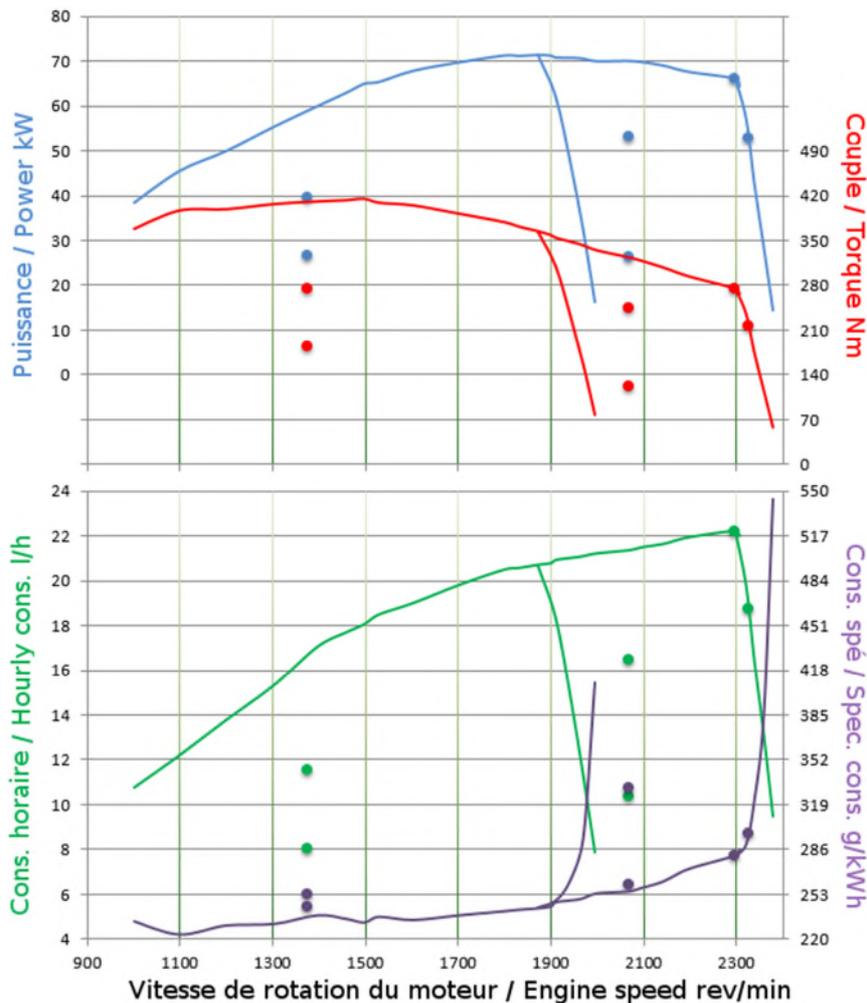

PARTICULATE FILTER ACTIVE REGENERATION FUEL USE

Not Applicable

HYDRAULIC PERFORMANCE AND POWER LIFT TEST

Hydraulic system

Open centre

Relief valve pressure setting (tolerance):

19 ± 0,5 MPa

HYDRAULIC PERFORMANCES

At maximum hydraulic power

Flow rate, Pressure, Power (couplers: 1 pair)	60,9 l/min	16,0 MPa	16,0 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)		<i>Not</i>	<i>Applicable</i>

POWER LIFT

Maximum lifting force

at the hitch points

27,7 kN

at the frame

23,2 kN




DRAWBAR TEST

Front tyres, Rear tyres	380/70 R 24	480/70 R 34
Inflation pressure	160 kPa	160 kPa

UNBALLASTED

Total Mass	3810 kg
Maximum drawbar pull	30,8 kN
at speed of	2,83 km/h
Maximum power	59,2 kW
at speed of	14,86 km/h

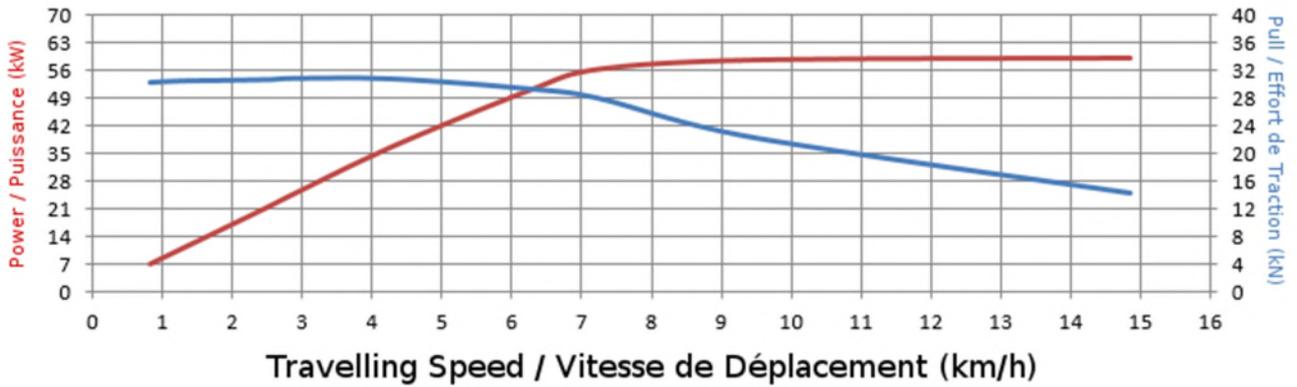

BALLASTED

Not Applicable