

OECD ABSTRACT OF AGRICULTURAL AND FORESTRY TRACTOR PERFORMANCE TEST

OECD Approval Number	2/2 918
OECD Approval Date	14/01/2016
Make	John Deere
Model	9370R
Type	4WD with dual wheels
Transmission	Full PowerShift
Speed	40 km/h
Manufacturer	John Deere Tractor Works
Testing Station	NTTL – U.S.A.



SPECIFICATIONS

ENGINE

<i>Make</i>	John Deere
<i>Model</i>	6090RW434
<i>Type</i>	Direct injection
<i>Supercharging</i>	Yes
<i>Cylinders</i>	6
<i>Disposition</i>	vertical in line
<i>Capacity</i>	8984 cm ³
<i>Cooling</i>	Liquid

TRANSMISSION

<i>Gear box</i>	Full PowerShift
<i>Number of forward and reverse speeds</i>	18 6
<i>Speed at rated engine speed</i>	from 3,81 to 37,78 km/h

POWER TAKE-OFF SPECIFICATIONS

<i>Standard Power take-off speed</i>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>		1108 min ⁻¹
<i>Diameter of the shaft</i>	Not	45 mm
<i>Number of splines</i>	Applicable	20

PTO TEST RESULTS

One hour test at maximum power

Power, Engine and Power take-off speed	264,43 kW	1800 min ⁻¹	950 min ⁻¹
Hourly and specific consumption		72,24 l/h	230 g/kWh
Hourly and specific urea consumption		1,73 l/h	7,1 g/kWh-

Test at maximum power at rated engine speed

Power, Engine and Power take-off speed	229,42 kW	2099 min ⁻¹	1108 min ⁻¹
Hourly and specific consumption		65,62 l/h	241 g/kWh
Hourly and specific urea consumption		1,36 l/h	6,4 g/kWh-

Test at standard Power take-off speed


Power, Engine and Power take-off speed	262,68 kW	1895 min ⁻¹	1000 min ⁻¹
Hourly and specific consumption		72,02 l/h	231 g/kWh
Hourly and specific urea consumption		1,70 l/h	7,0 g/kWh-

Torque rise

46,7 %

Maximum torque, Engine speed corresponding

1531,05 Nm

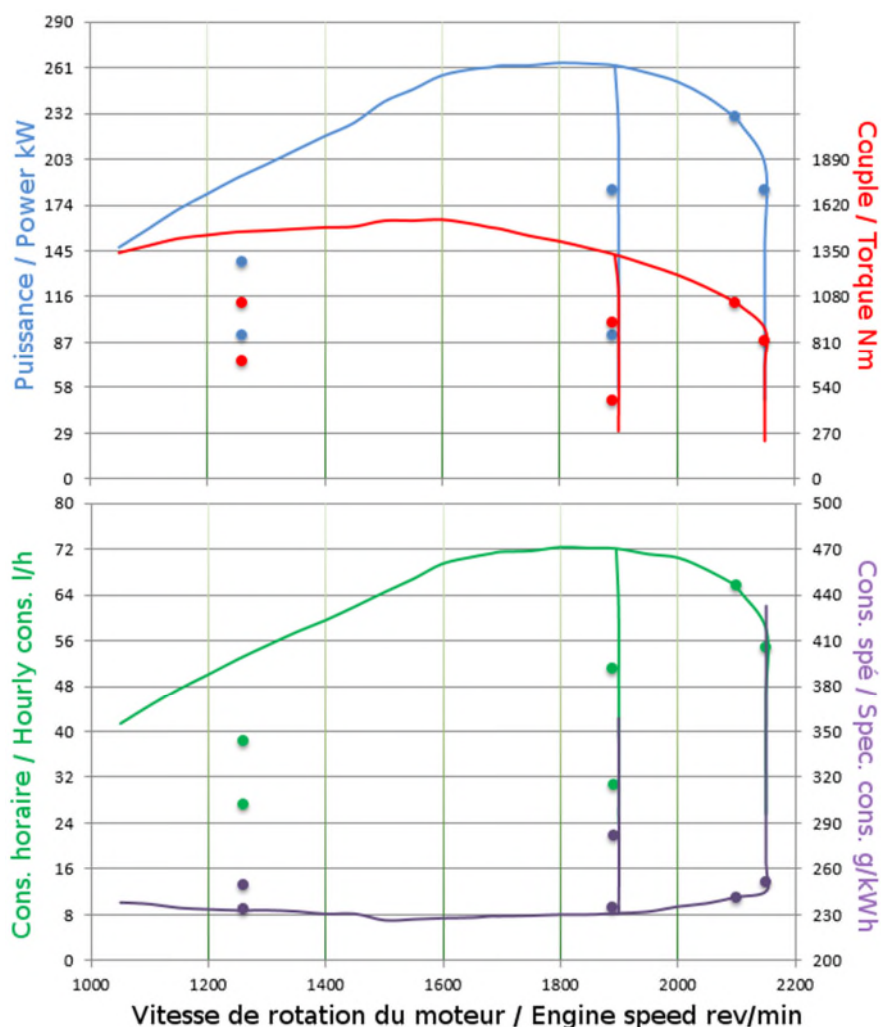1599 min⁻¹

PARTICULATE FILTER ACTIVE REGENERATION FUEL USE

	l	mm:ss
Rated Engine Speed	4,9	38:03
40% of maximum power at rated engine speed with throttle set to 90% of rated engine speed	4,2	39:56
60% of maximum power at rated engine speed with throttle set to 60% of rated engine speed	3,2	39:42

HYDRAULIC PERFORMANCE AND POWER LIFT TEST

Hydraulic system	Closed centre
Relief valve pressure setting (tolerance):	20,0 ± 0,5 MPa

HYDRAULIC PERFORMANCES


At maximum hydraulic power

Flow rate, Pressure, Power (couplers: 1 pair)	135,1 l/min	15,51 MPa	34,9 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	226,0 l/min	17,59 MPa	66,3 kW

POWER LIFT

Maximum lifting force

at the hitch points	76,1 kN
at the frame	63,3 kN

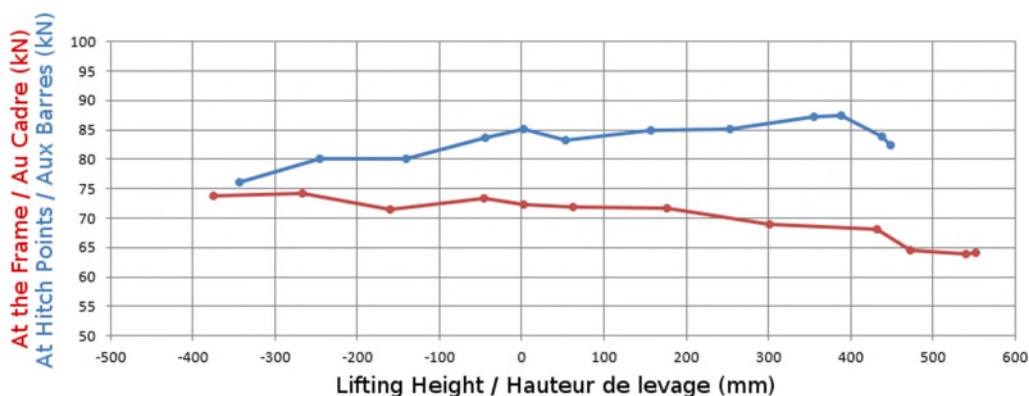


DRAWBAR TEST

Front tyres, Rear tyres	480/80 R46	480/80 R46
Inflation pressure	124 kPa	97 kPa

UNBALLASTED

Total Mass	17880 kg
Maximum drawbar pull	173,41 kN
at speed of	3,40 km/h
Maximum power	246,39 kW
at speed of	11,10 km/h

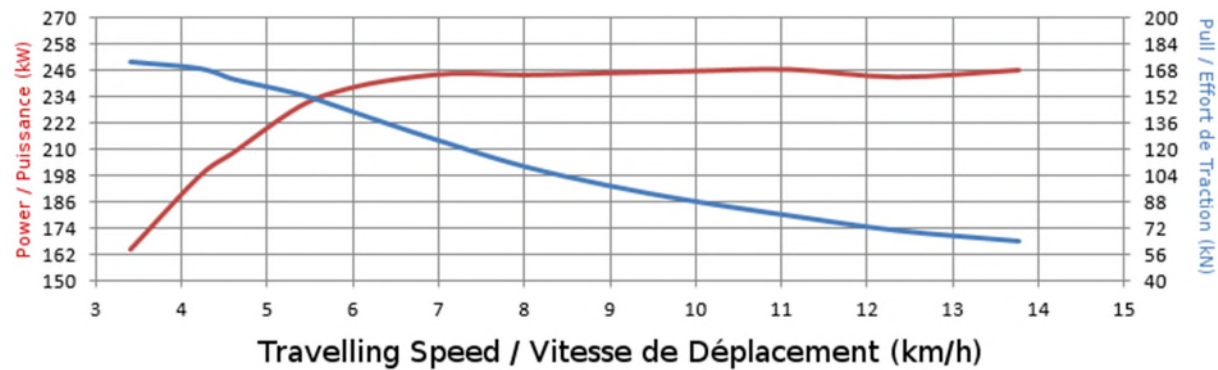

BALLASTED

Not available