OECD ABSTRACT OF AGRICULTURAL AND FORESTRY TRACTOR PERFORMANCE TEST

OECD Approval Number	2/2 963/1
OECD Approval Date	06/12/2016
Make	NEW HOLLAND
Model	T7.210 AC
Туре	4 WD
Transmission	Continuously variable transmission
Speed	50 km/h
Manufacturer	CNH Industrial Europe Holding S.A.
Testing Station	BLT – Austria







[Page 1/6]

SPECIFICATIONS

ENGINE

Make Model Type	FTP Industrial F4DFE613M*B Direct injection
Supercharging	Yes
Cylinders	6
Disposition	vertical in line
Capacity	6728 cm ³
Cooling	Liquid

TRANSMISSION	
--------------	--

Gear box		CVT
Number of forward and reverse speeds	2	1
Speed at rated engine speed	from 0	to 47,30 km/h

POWER TAKE-OFF SPECIFICATIONS

Standard Power take-off speed	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
Power take-off speed at rated engine speed	603 min ⁻¹	1141 min ⁻¹
Diameter of the shaft	35 mm	35 mm
Number of splines	6	21






PTO TEST RESULTS

96,7 kW 112, kW	31,91 l/h - 2200 min ⁻¹ 30,48 l/h - 1930 min ⁻¹ 32,36 l/h -	933 min ⁻¹ 234 g/kWh - 1140 min ⁻¹ 262 g/kWh - 1000 min ⁻¹ 240 g/kWh -
		58,3 %
	664,0 Nm	1500 min ⁻¹
	96,7 kW 112, kW	96,7 kW 2200 min ⁻¹ 30,48 l/h 112, kW 1930 min ⁻¹ 32,36 l/h 664,0 Nm





POWERBOOST - PTO TEST RESULTS

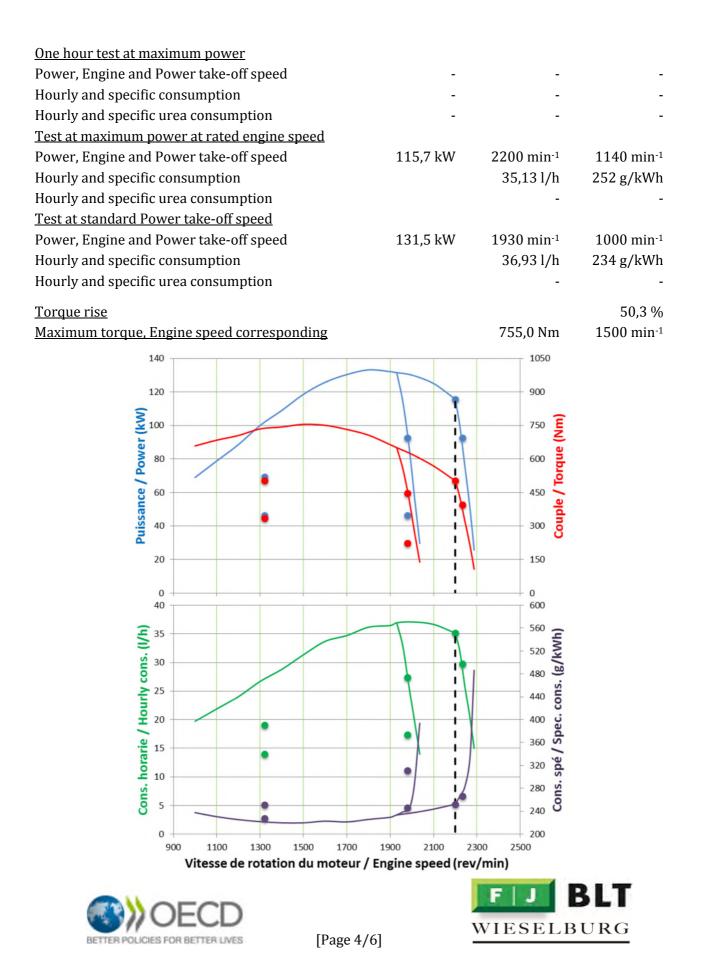

PARTICULATE FILTER ACTIVE REGENERATION FUEL USE

Not available

HYDRAULIC PERFORMANCE AND POWER LIFT TEST

Hydraulic system Relief valve pressure setting (tolerance): closed centre 21,0 ± 0,5 MPa

HYDRAULIC PERFORMANCES

<u>At maximum hydraulic power</u>			
Flow rate, Pressure, Power (couplers: 1 pair)	93,5 l/min	17,0 MPa	26,5 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	113,2 l/min	17,0 MPa	32,1 kW

POWER LIFT

Maximum lifting force at the hitch points at the frame


43,3 kN 36,4 kN

Hiting Height / Hauteur de levage (mm)





DRAWBAR TEST

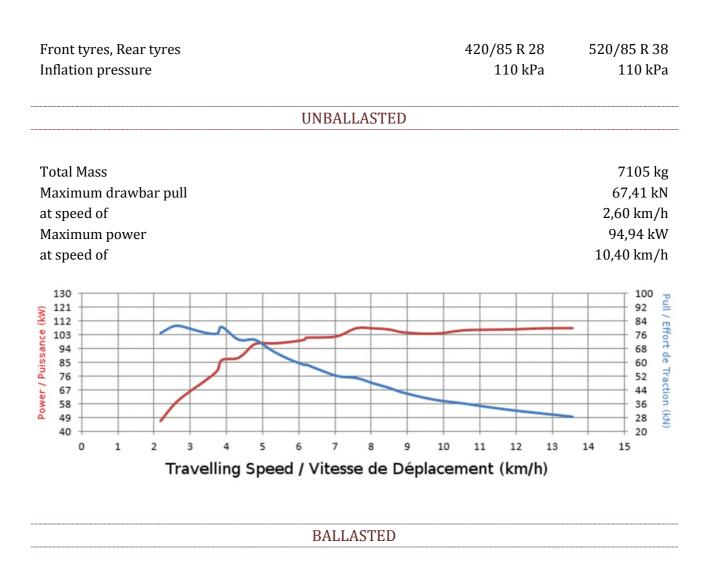

Not available



