

OECD ABSTRACT OF AGRICULTURAL AND FORESTRY TRACTOR PERFORMANCE TEST

OECD Approval Number	2/2 970
OECD Approval Date	26/07/2016
Make	CASE IH
Model	PUMA 150 CVT
Type	4 WD
Transmission	Continuously variable transmission
Speed	40 km/h
Manufacturer	CNH Industrial Europe Holding S.A.
Testing Station	BLT – Austria



SPECIFICATIONS

ENGINE

<i>Make</i>	FTP Industrial	
<i>Model</i>	F4DFE613M*B	
<i>Type</i>	Direct injection	
<i>Supercharging</i>	Yes	
<i>Cylinders</i>	6	
<i>Disposition</i>	vertical in line	
<i>Capacity</i>	6728 cm ³	
<i>Cooling</i>	Liquid	

TRANSMISSION

<i>Gear box</i>		CVT
<i>Number of forward and reverse speeds</i>	2	1
<i>Speed at rated engine speed</i>	from 0	to 37,80 km/h

POWER TAKE-OFF SPECIFICATIONS

<i>Standard Power take-off speed</i>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>	603 min ⁻¹	1141 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

PTO TEST RESULTS

One hour test at maximum power

Power, Engine and Power take-off speed	105,0 kW	1800 min ⁻¹	933 min ⁻¹
Hourly and specific consumption		29,40 l/h	231 g/kWh
Hourly and specific urea consumption		2,08 l/h	21,3 g/kWh

Test at maximum power at rated engine speed

Power, Engine and Power take-off speed	88,2 kW	2200 min ⁻¹	1140 min ⁻¹
Hourly and specific consumption		28,29 l/h	264 g/kWh
Hourly and specific urea consumption		1,89 l/h	23,0 g/kWh

Test at standard Power take-off speed

Power, Engine and Power take-off speed	101,2 kW	1930 min ⁻¹	1000 min ⁻¹
Hourly and specific consumption		29,35 l/h	239 g/kWh
Hourly and specific urea consumption		2,09 l/h	22,2 g/kWh


Torque rise

58,1 %

Maximum torque, Engine speed corresponding

603,6 Nm

1500 min⁻¹

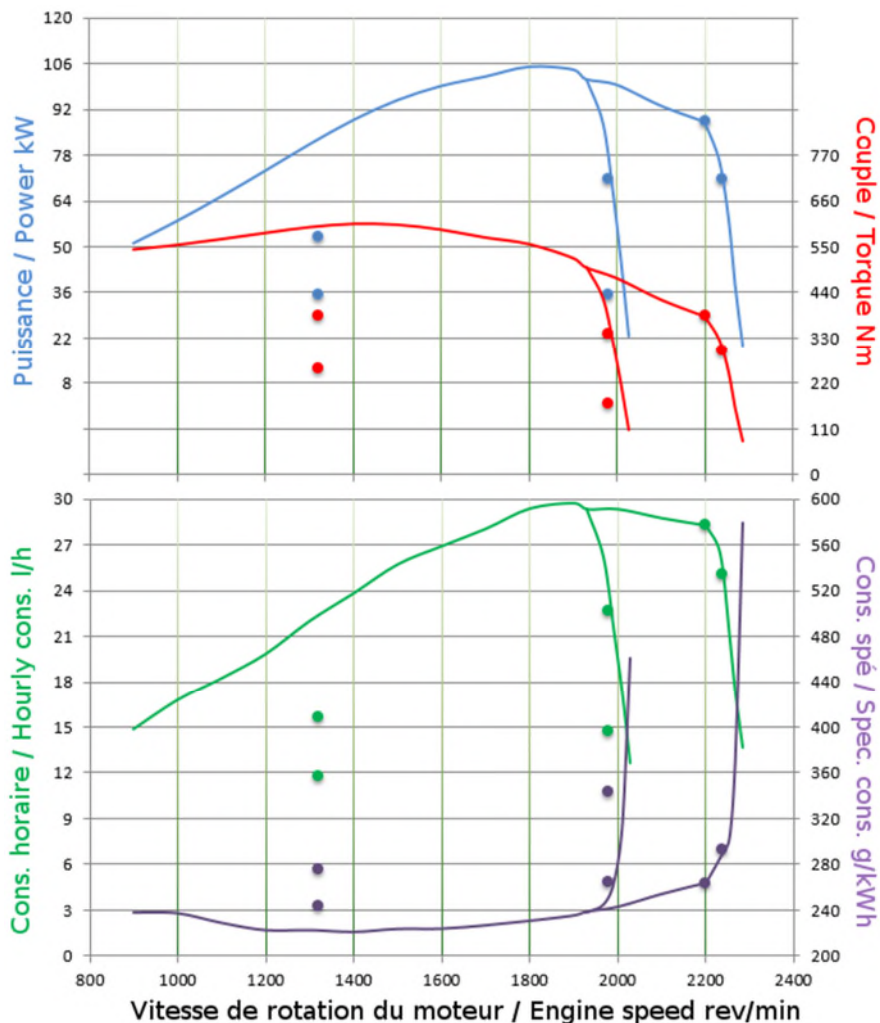

POWERBOOST - PTO TEST RESULTS

One hour test at maximum power

Power, Engine and Power take-off speed	-	-	-
Hourly and specific consumption	-	-	-
Hourly and specific urea consumption	-	-	-

Test at maximum power at rated engine speed

Power, Engine and Power take-off speed	105,1 kW	2200 min ⁻¹	1140 min ⁻¹
Hourly and specific consumption		33,08 l/h	259 g/kWh
Hourly and specific urea consumption		2,19 l/h	22,5 g/kWh

Test at standard Power take-off speed


Power, Engine and Power take-off speed	119,5 kW	1930 min ⁻¹	1000 min ⁻¹
Hourly and specific consumption		33,77 l/h	233 g/kWh
Hourly and specific urea consumption		2,42 l/h	21,8 g/kWh

Torque rise

51,8 %

Maximum torque, Engine speed corresponding

692,7 Nm 1500 min⁻¹

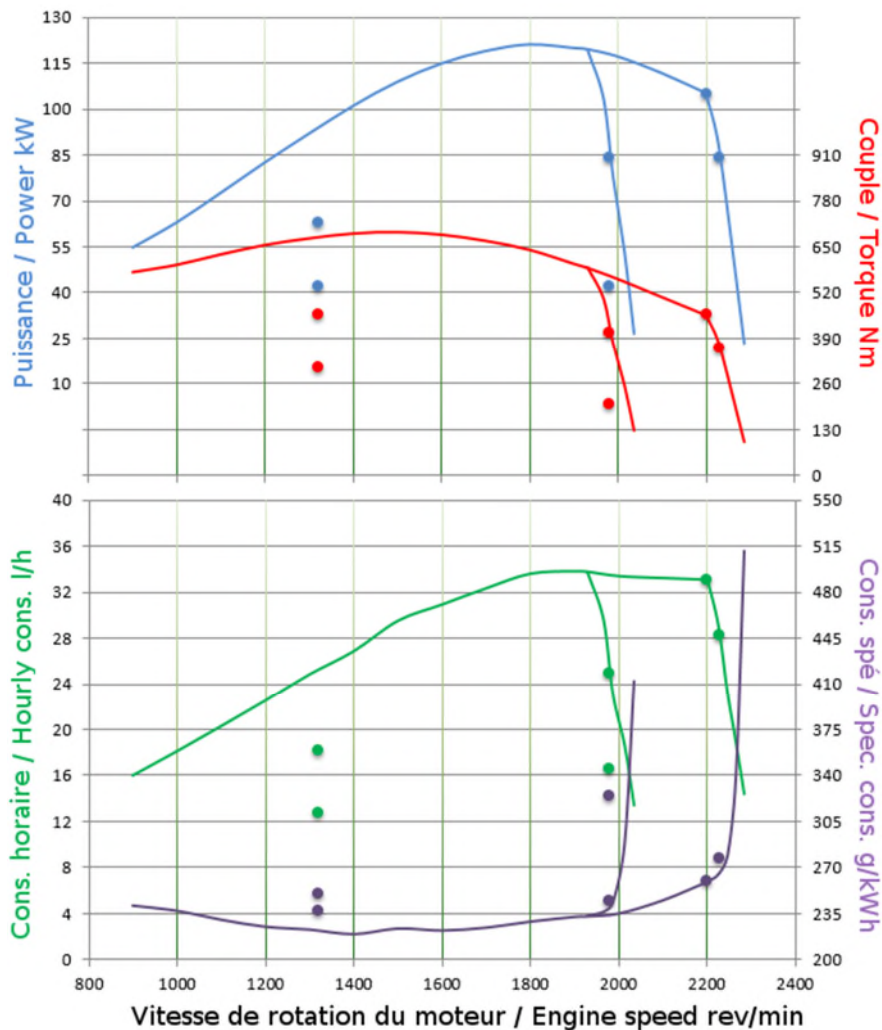

PARTICULATE FILTER ACTIVE REGENERATION FUEL USE

Not available

HYDRAULIC PERFORMANCE AND POWER LIFT TEST

Hydraulic system closed centre
 Relief valve pressure setting (tolerance): 21,0 ± 0,5 MPa


HYDRAULIC PERFORMANCES

At maximum hydraulic power

Flow rate, Pressure, Power (couplers: 1 pair)	93,2 l/min	17,0 MPa	26,4 kW
Flow rate, Pressure, Power (couplers: 2 pairs or +)	111,7 l/min	18,0 MPa	33,5 kW

POWER LIFT

Maximum lifting force
 at the hitch points 49,7 kN
 at the frame 36,6 kN

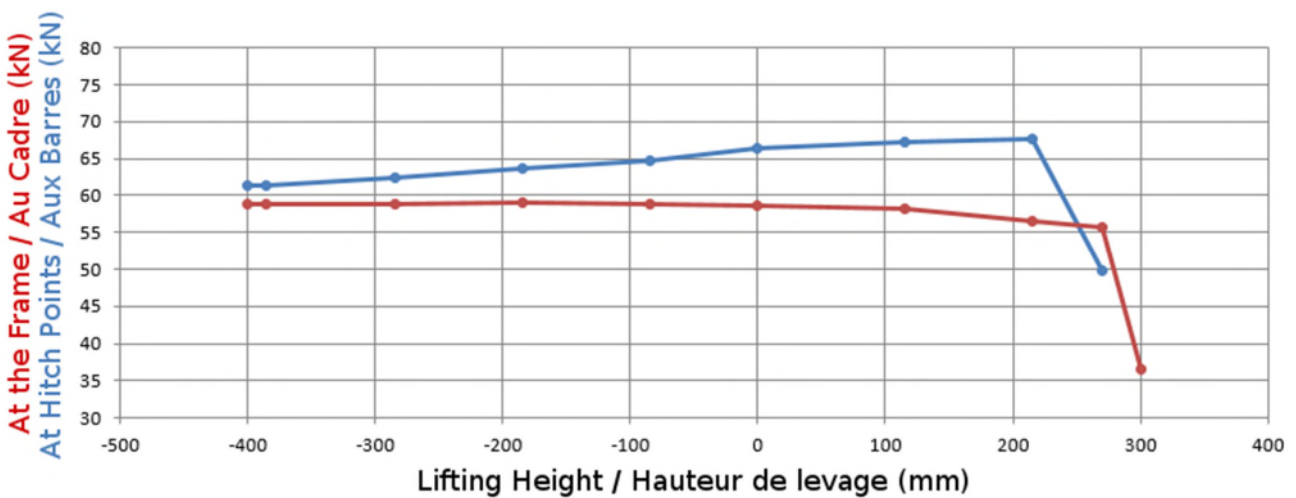


DRAWBAR TEST

Front tyres, Rear tyres	420/85 R 28	520/85 R 38
Inflation pressure	110 kPa	110 kPa

UNBALLASTED

Total Mass	7105 kg
Maximum drawbar pull	69,11 kN
at speed of	2,18 km/h
Maximum power	97,76 kW
at speed of	6,23 km/h

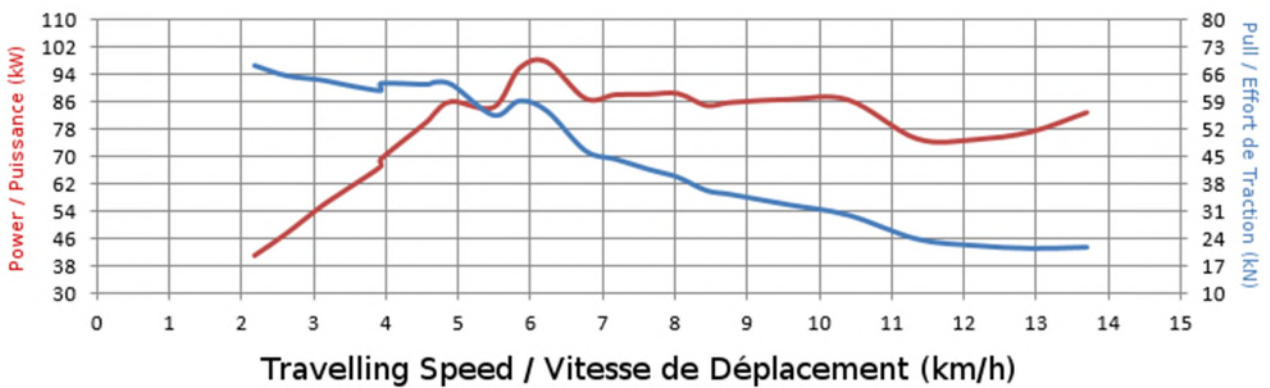

BALLASTED

Not available