



OECD approval number

1 691/1

OECD approval date

Restricted Code

21/10/1997

Make

Case IH

Model

MX 110

Type

4 WD

série MAXXUM - 16 speeds - 30 km/h

Manufacturer

Case United Kingdom Limited


Testing station:

DLG, Gross-Umstadt, Germany

Case MX 110

4 RM/WD

OCDE/OECD 1691/1

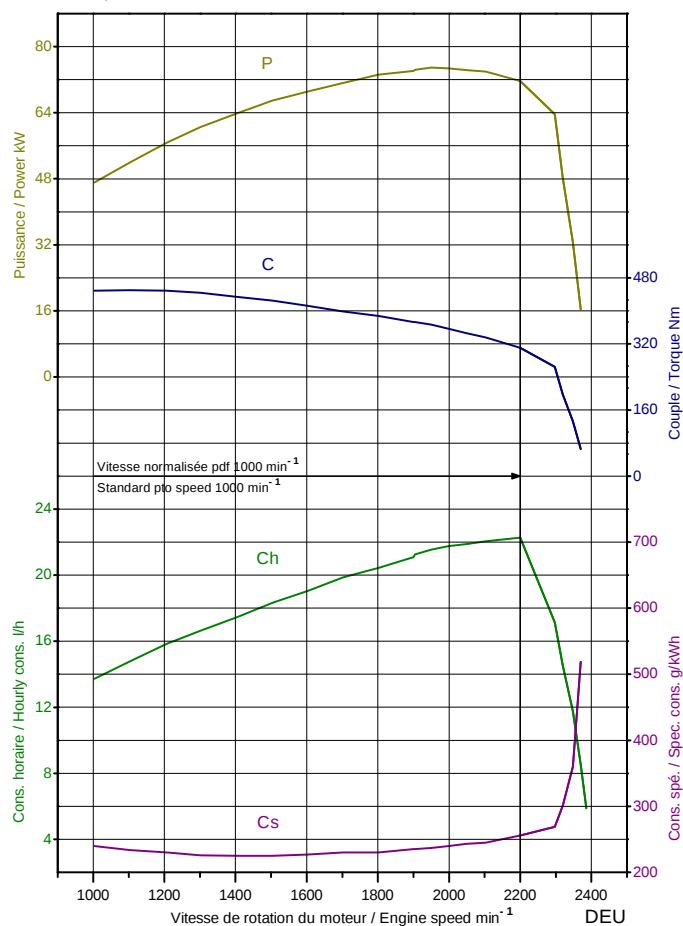

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	CDC	6T-590
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	5883 cm ³	Liquid
<i>Gear box</i>		Mechanical synchronized
<i>Number of forward and reverse speeds</i>	16	12
<i>Speed at rated engine speed</i>	from 2.19	to 29.57 km/h
<i>Standard Power take-off speed</i>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>	634 min ⁻¹	996 min ⁻¹
<i>Diameter of the shaft</i>	35 mm	35 mm
<i>Number of splines</i>	6	21

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	74.9 kW	1950 min ⁻¹	883 min ⁻¹
<i>Hourly and specific consumption</i>		21.55 l/h	237 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	71.7 kW	2200 min ⁻¹	996 min ⁻¹
<i>Hourly and specific consumption</i>		22.28 l/h	256 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	71.7 kW	2200 min ⁻¹	996 min ⁻¹
<i>Hourly and specific consumption</i>		22.28 l/h	256 g/kWh

Torque rise

44.7 %

Maximum torque, Engine speed corresponding450.0 Nm 1102 min⁻¹**Drawbar Test***Front tyres, Rear tyres*

16.9 R 28 20.8 R 38

Test with tractorunballasted ballasted*Total Mass*

5810 kg

Maximum drawbar pull

62.9 kN

*at speed of*2.43 km/h *required**Maximum power*

66.2 kW

*at speed of*7.09 km/h *Code 2***Hydraulic Performance and Power Lift Test***Hydraulic system*

Closed centre

At maximum hydraulic power

<i>Flow rate, Pressure, Power</i>	89.7 l/min	15.5 MPa	22.4 kW
-----------------------------------	------------	----------	---------

Maximum lifting force

<i>at hitch points, at frame</i>		44.7 kN	35.3 kN
----------------------------------	--	---------	---------

