



OECD approval number

1 716

Restricted Code

OECD approval date

12/12/1997

Make

Zetor

Model

5341 Super

Type

4 WD

10 speeds - 30 km/h

Manufacturer

Zetor a.s


Testing station:

SZZPLS, Praha, Czech Republic

Zetor 5341 Super

4 RM/WD

OCDE/OECD 1716

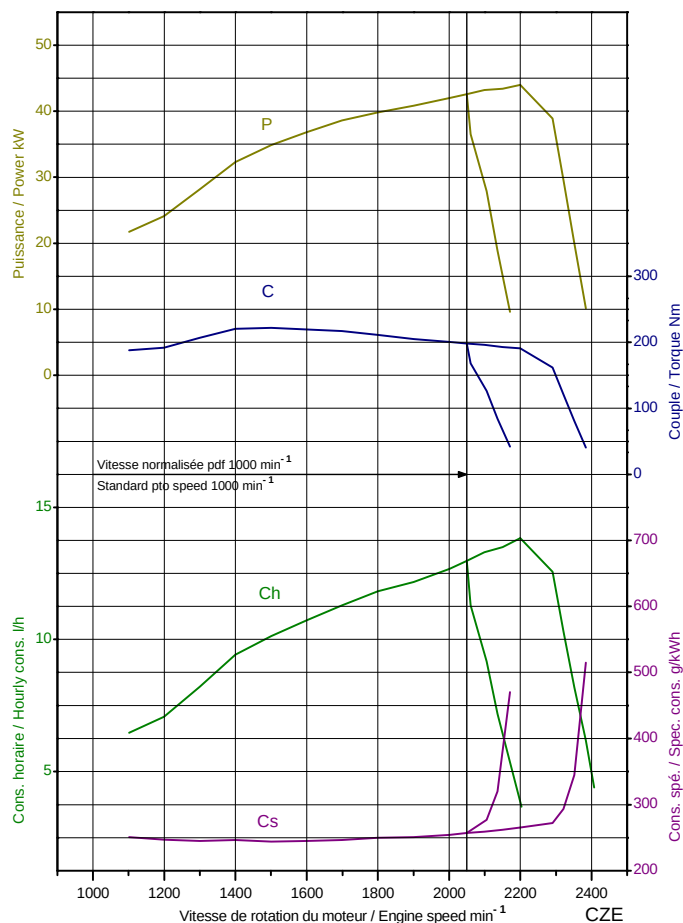

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Zetor	7202
<i>Type, Supercharging</i>	Direct injection	None
<i>Cylinders, Disposition</i>	4	vertical in line
<i>Capacity, Cooling</i>	3922 cm ³	Liquid
<i>Gear box</i>		Mechanical synchronized
<i>Number of forward and reverse speeds</i>	10	2
<i>Speed at rated engine speed</i>	from 1.64	to 29.82 km/h
<i>Standard Power take-off speed</i>	540 min ⁻¹	1000 min ⁻¹
<i>Power take-off speed at rated engine speed</i>	596 min ⁻¹	1073 min ⁻¹
<i>Diameter of the shaft</i>	34.9 mm	34.9 mm
<i>Number of splines</i>	6	6

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	44.0 kW	2200 min ⁻¹	1073 min ⁻¹
<i>Hourly and specific consumption</i>		13.84 l/h	265 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	44.0 kW	2200 min ⁻¹	1073 min ⁻¹
<i>Hourly and specific consumption</i>		13.84 l/h	265 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	42.6 kW	2050 min ⁻¹	1000 min ⁻¹
<i>Hourly and specific consumption</i>		12.98 l/h	257 g/kWh

Torque rise

<i>Maximum torque, Engine speed corresponding</i>		222.0 Nm	1501 min ⁻¹
---	--	----------	------------------------

Drawbar Test

<i>Front tyres, Rear tyres</i>	12.4 R 24	16.9 R 34
<i>Test with tractor</i>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	3570 kg	
<i>Maximum drawbar pull</i>	30.6 kN	Not
<i>at speed of</i>	2.07 km/h	required
<i>Maximum power</i>	34.5 kW	in
<i>at speed of</i>	6.11 km/h	Code 2

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>			Opened centre
<i>At maximum hydraulic power</i>			
<i>Flow rate, Pressure, Power</i>	40.0 l/min	16.8 MPa	11.2 kW
<i>Maximum lifting force</i>			
<i>at hitch points, at frame</i>		35.6 kN	23.8 kN

