



OECD approval number

2/2 199

OECD approval date

Restricted Code

13/12/2004

Make

Massey Ferguson

Model

6490

Type

2 WD

Y30521AJ113A - 40 km/h

Manufacturer

AGCO S.A.


Testing station:

Cemagref, Antony, France

Massey Ferguson 6490

2 RM/WD

OCDE/OECD 2/2199

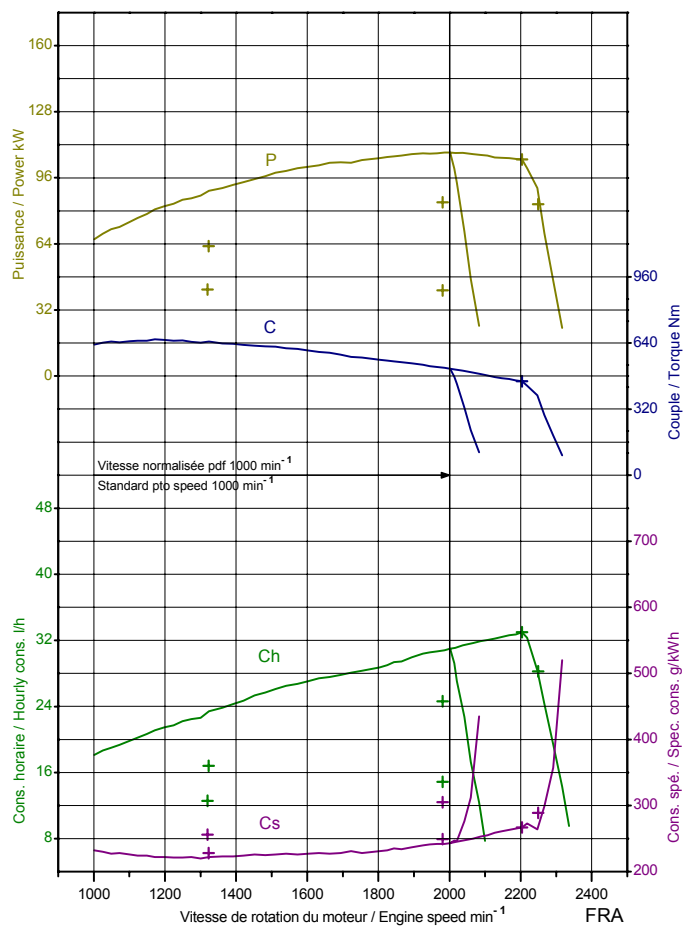

Engine, Transmission, Power take-off Specifications

<i>Make, Model</i>	Sisu Diesel	66.253 ETA
<i>Type, Supercharging</i>	Direct injection	Yes
<i>Cylinders, Disposition</i>	6	vertical in line
<i>Capacity, Cooling</i>	6596 cm ³	Liquid
<i>Gear box</i>		Mechanical
<i>Number of forward and reverse speeds</i>	32	32
<i>Speed at rated engine speed</i>	from 2.36	to 40.00 km/h
<u>Standard Power take-off speed</u>	<u>540 min⁻¹</u>	<u>1000 min⁻¹</u>
<i>Power take-off speed at rated engine speed</i>	594 min ⁻¹	1100 min ⁻¹
<i>Diameter of the shaft</i>	34.9 mm	34.9 mm
<i>Number of splines</i>	6	21

Power take-off TestTwo hours test at maximum power

<i>Power, Engine and Power take-off speed</i>	108.3 kW	2002 min ⁻¹	1001 min ⁻¹
<i>Hourly and specific consumption</i>		31.01 l/h	243 g/kWh

Test at maximum power at rated engine speed

<i>Power, Engine and Power take-off speed</i>	104.9 kW	2204 min ⁻¹	1102 min ⁻¹
<i>Hourly and specific consumption</i>		33.00 l/h	267 g/kWh

Test at standard Power take-off speed

<i>Power, Engine and Power take-off speed</i>	108.3 kW	2002 min ⁻¹	1001 min ⁻¹
<i>Hourly and specific consumption</i>		31.01 l/h	243 g/kWh

Torque rise

		44.8 %
--	--	--------

<u>Maximum torque, Engine speed corresponding</u>	657.7 Nm	1172 min ⁻¹
---	----------	------------------------

Drawbar Test

<i>Front tyres, Rear tyres</i>	14 - 16.1	620/70 R 42
<u>Test with tractor</u>	<u>unballasted</u>	<u>ballasted</u>
<i>Total Mass</i>	6280 kg	
<i>Maximum drawbar pull</i>	56.4 kN	Not
<i>at speed of</i>	2.18 km/h	required
<i>Maximum power</i>	96.3 kW	in
<i>at speed of</i>	12.37 km/h	Code 2

Hydraulic Performance and Power Lift Test

<i>Hydraulic system</i>		Closed centre
<u>At maximum hydraulic power</u>		
<i>Flow rate, Pressure, Power</i>	94.4 l/min	13.8 MPa 21.7 kW
<u>Maximum lifting force</u>		
<i>at hitch points, at frame</i>	73.5 kN	67.8 kN

